

FPC-12596 - 6KVA BATTERY BACKUP

HARDWARE FEATURES

Enclosure:

- IP44 rated
- Powder coated mild steel
- Removable gland plates
- Integral ventilation

Protection:

- Padlockable AC mains power isolator switch
- Padlockable DC battery isolator switch
- Battery protection fuse
- Din rail mounted terminal connections

Control & interface:

- Battery charger, power monitor and power inverter (6kVA)

Inputs:

- Single phase (230Vac) mains power supply

Outputs:

- Single phase (230Vac) power supply output

Included with panel:

- Built in 6V batteries (4x for 225 A/h option, 8x for 450 A/h option) for 24Vdc supply to inverter

FUNCTION FEATURES

Operation:

- Provides constant 230Vac power to a pump controller or alternative control panel
- Automatic changeover of power source on mains failure
- Automatic change back to mains supply when available again
- Automatic battery charging whilst mains is connected
- Battery status can be viewed on inverter screen

Fault protection:

- Intelligent over current protection, electronic sensitivity
- DC battery source fusing
- Battery low voltage protection prevents batteries from going completely flat




POWER MANAGEMENT SYSTEMS - 6KVA BATTERY BACKUP RANGE


Code	Inverter Rating	Battery Capacity	Max Starting Current	Max Run Current	Enclosure Size
FPC-12596-225	6 kVA	225 A/h	36 Amps	25 Amps	800x800x300mm
FPC-12596-450	6 kVA	450 A/h	36 Amps	25 Amps	1200x800x400mm

FPC-12596 - 6KVA BATTERY BACKUP

SCHEMATIC

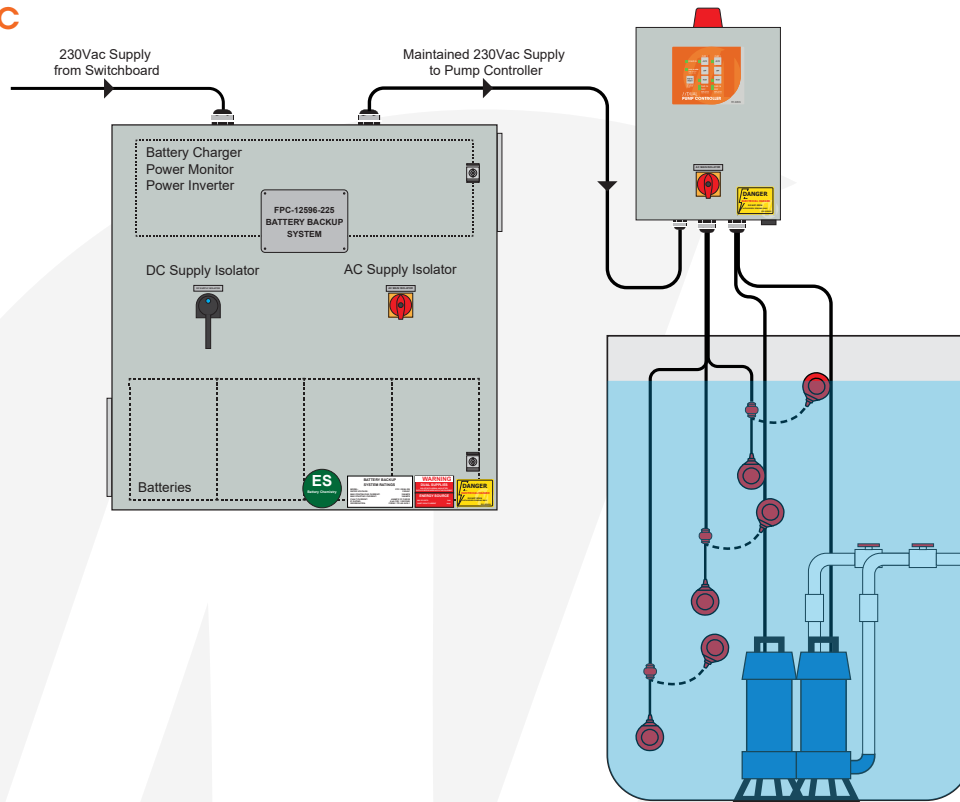

RUN TIMES

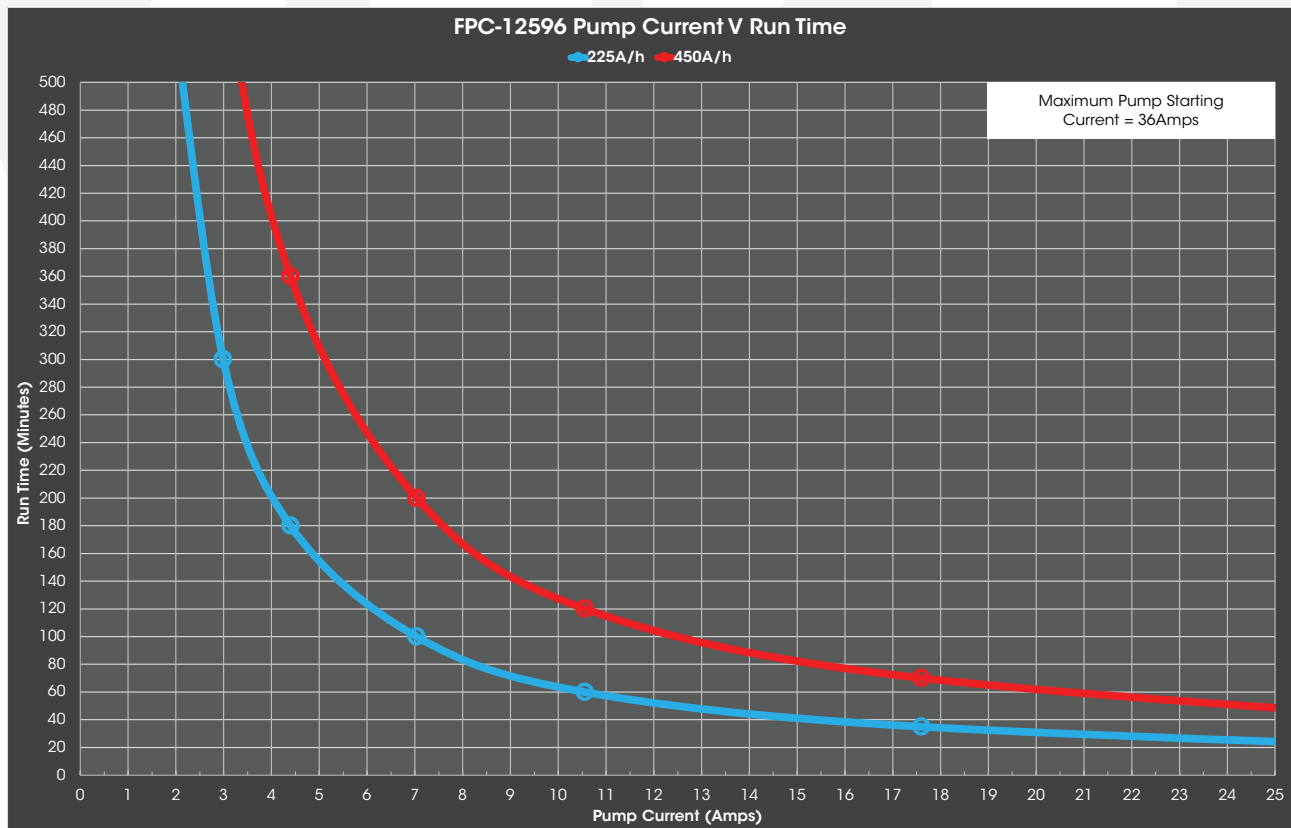

Note: Run time based on new batteries at full battery charge and 25°C. Run time will be reduced with battery age and number of discharge cycles.