

CAT EB92 (1Φ)
EASM (3Φ)



2" Self priming, stainless steel, electric drive, transfer pump with open impeller.

Features

- Heavy duty cast construction
- Open non clog style impeller
- Self primes from 6 metres
- Replaceable suction port
- Close coupled to a heavy duty TEFC three phase electric motor

Benefits

- ⇒ Long trouble free life
- ⇒ Pumps solids in suspension
- ⇒ Ready to pump in minimum amount of time
- ⇒ Easy access to check valve for servicing
- ⇒ Compact design for ease of installation



Applications

- Mine tailings dam pump out
- Aggressive water pumping
- Effluent handling
- Acid & solvent pumping
- Industrial food waste


Performance		Construction		Technical Data		
Max suction depth	6m	Pump body	316 Stainless steel	Model	B2KQ-A/X (EB92)	B2KQ-A/X (EASM)
Max temp of liquid	+70°C	Valve body	316 Stainless steel	kW	2.2 (single phase)	2.2 (three phase)
Max solids diameter	16mm	Support	Cast iron/ 316 Stainless steel	Frequency (Hz)	50	50
Max delivery	26.5m ³ /h (440 lpm)	Impeller	316 Stainless steel	Rated Current (A)	9	8.3/4.8
Max pressure	1.9 BAR (20m head)	Motor shaft	316 Stainless steel	Protection	IP54	IP54
Inlet/outlet	2"G	Seal	Nbr/Carbon/AISI 316/ Alumina	RPM	2800	2800
				Weight (Kg)	28.5	28.5
				Boxed Dimensions (mm)	210 x 450 x 400	

Tolerance & curves according to UNI EN ISO 9906 attachment A


**CAT EB92 (1Φ)
EASM (3Φ)**

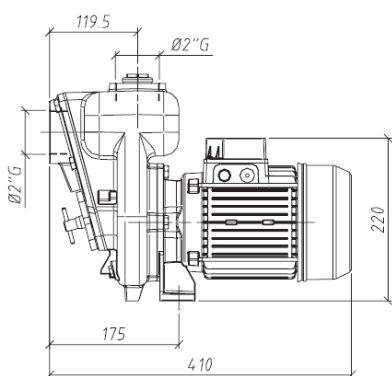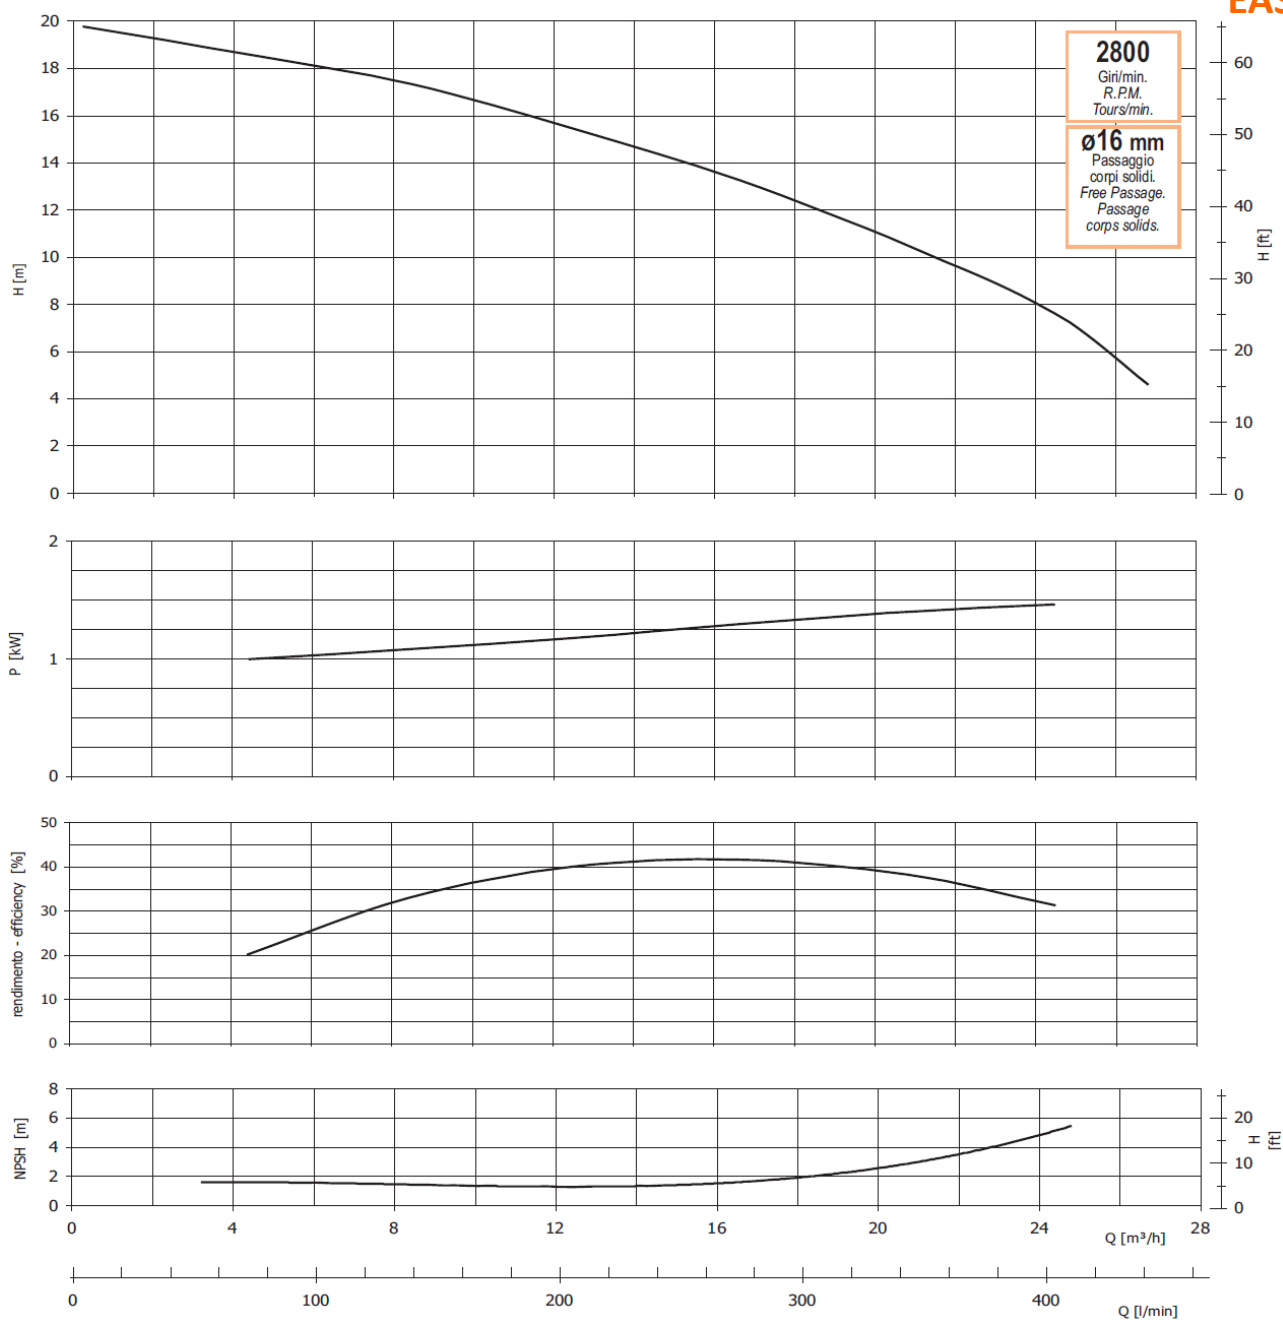

EASM (3Φ)

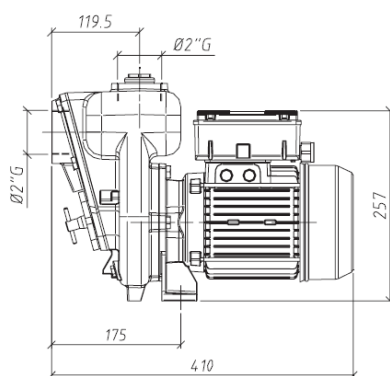

EB92 (1Φ)

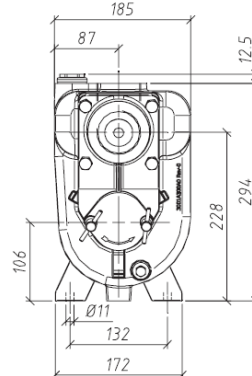

Due to our program of continuous product development the manufacturer reserves the right to alter specifications without notice.