



# e.sylne

THE NEWEST INNOVATION IN  
ELECTRONIC PRESSURE SYSTEMS.




2019

**WHITE**  
INTERNATIONAL

THE NEWEST INNOVATION IN  
ELECTRONIC PRESSURE SYSTEMS.  
**SAVE MONEY – SAVE ENERGY**

2 MODELS... 1 COMPLETE LINE

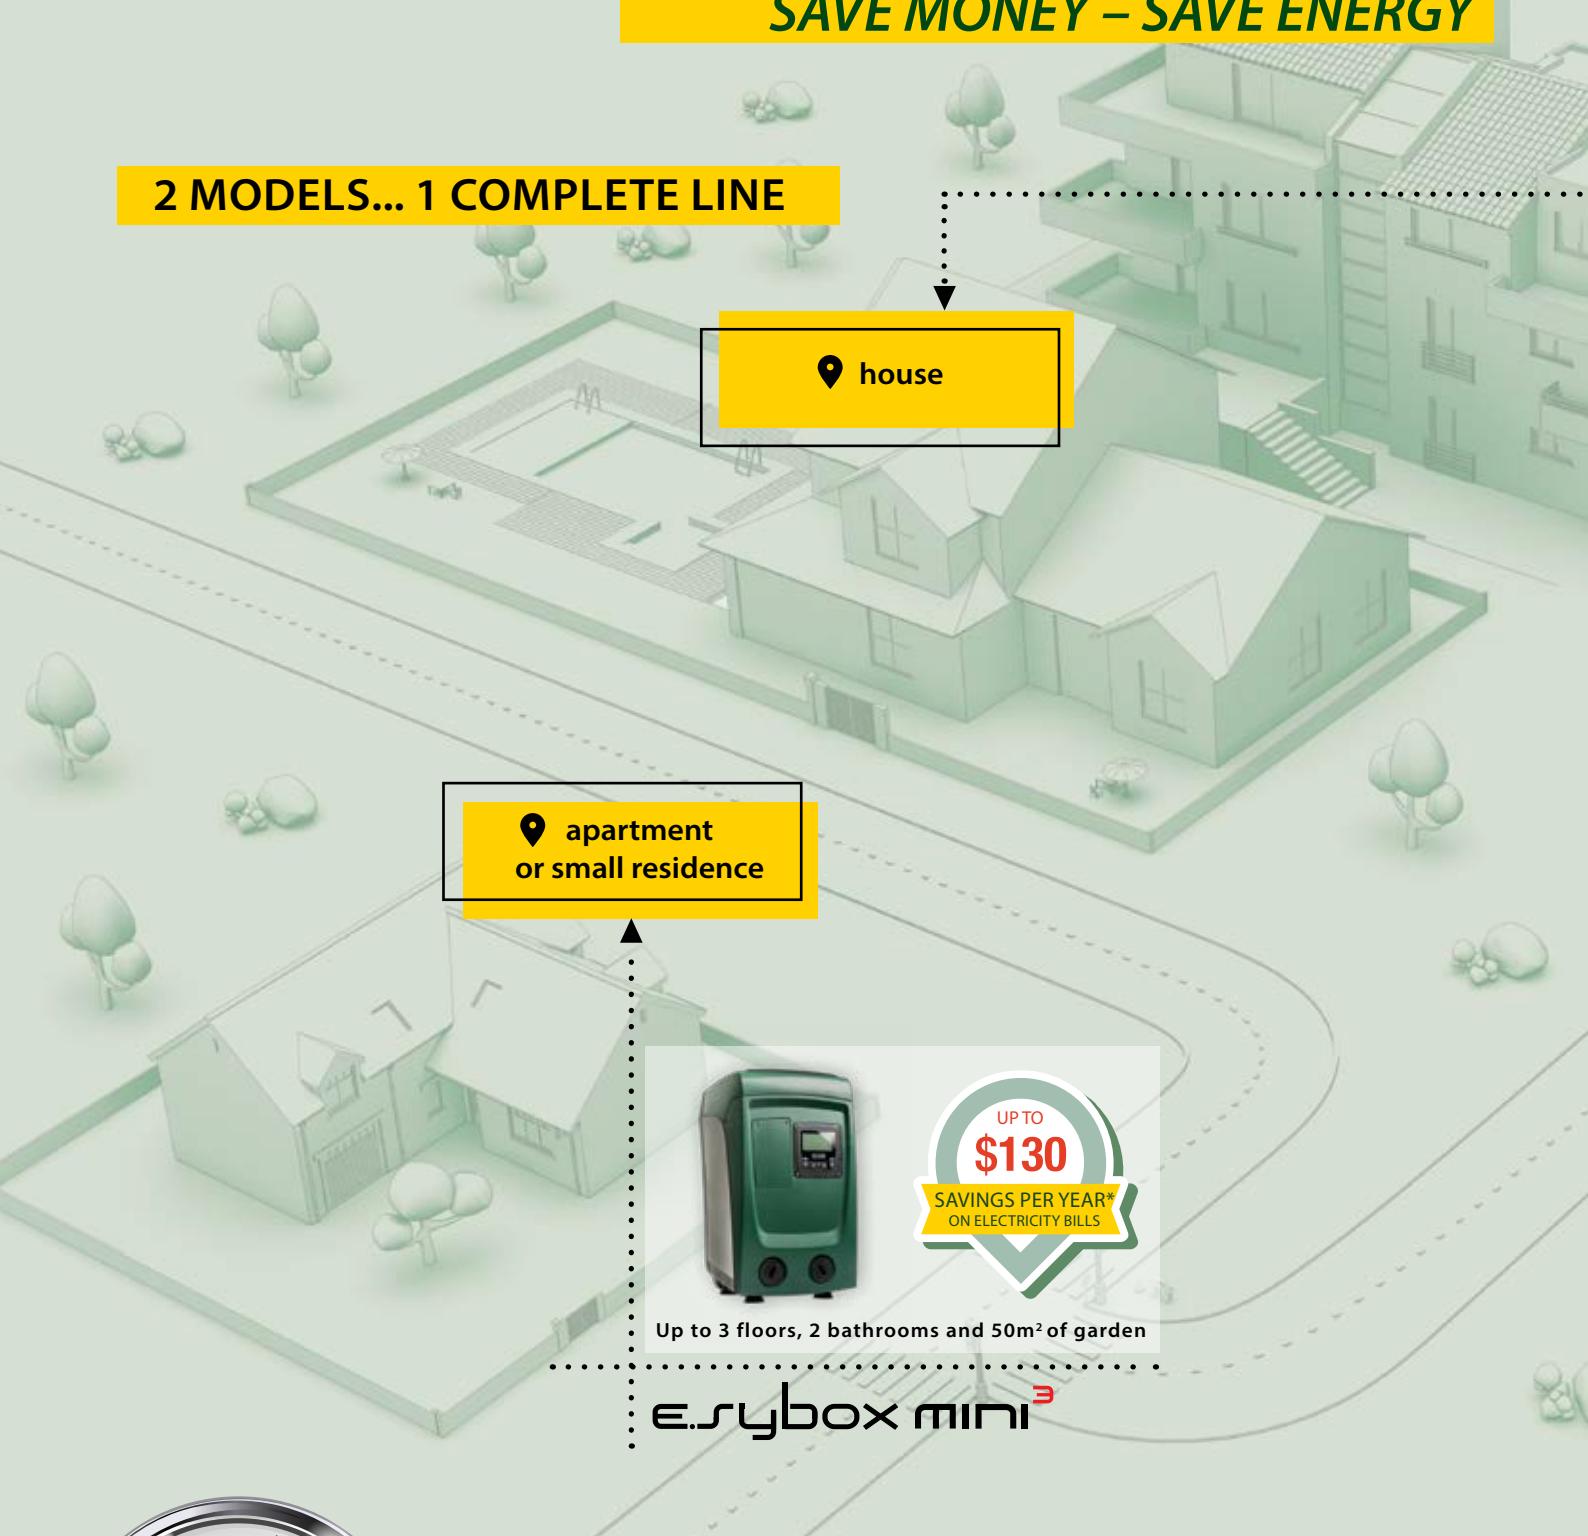

e.syline, a complete line of electronic booster pump solutions that redefines the rules of residential water pressurisation. With two models, e.syline is a series of fully integrated pump systems and accessories. Designed to create a modular and flexible solution that meets a wide range of applications: from a small residence to a large complex of apartments.

**e.sybox**



Up to 6 floors - Max 9 apartments

**e.sybox**



small apartment complex

large apartment complex



UP TO \$1100 SAVINGS PER YEAR\* ON ELECTRICITY BILLS

Up to 9 floors - Max 17 apartments

**e.syTWIN**

\* \$AUD compared to a traditional booster set in terms of average usage conditions.



PRESSURISATION



GARDENING AND IRRIGATION



REUSE OF RAINWATER



# ELECTRONIC Water Pressure System

## E.SYBOX

**DAB-ESYBOX - 800621**

**e.sybox**



Leading the way in electronic pump technology, the E.SYBOX is a completely new solution in domestic water supply. It is ideal for water pressure boosting in domestic and light commercial applications.

The E.SYBOX is a revolutionary and innovative all-in-one pump solution comprising of:

- A self-priming multistage pump
- Electronics for control and management
- Pressure and flow sensors
- High-resolution LCD display
- 2 Litre integrated expansion vessel

### Features:

- Powerful performance flow up to 2 L/sec and head up to 6 bar
- Self priming up to 8 metres
- Dry run protection to stop pump damage if no water is present
- 2 Litre expansion tank protects against thermal fluctuations and reduces pump starts
- Intelligent anti-freeze protection prevents formation of ice inside unit
- Over/under voltage protection and over current protection
- Wireless connectivity facilitates the creation of pressure booster sets and connection to other DAB devices

### 2 Year Parts & Labour Warranty

AS/NZS4020 Drinking Water Approved



### ENERGY EFFICIENT

- VARIABLE SPEED INVERTER MAINTAINS CONSTANT PRESSURE USING LESS ENERGY UNDER LOW FLOWS.
- THE E.SYBOX IS AN ALL-IN-ONE HIGH EFFICIENCY PUMP AND CONTROL SOLUTION.
- SAVE POWER - 30-40% ENERGY SAVING!

### DESIGNED FOR DOMESTIC & RESIDENTIAL USE

- SLEEK DESIGN ALLOWS FOR QUICK AND EASY HORIZONTAL OR VERTICAL INSTALLATION.
- EASY TO USE LCD DISPLAY TO CUSTOMISE SETTINGS AND TRACK ENERGY SAVINGS.
- ULTRA COMPACT - 30% SPACE SAVING!

### EASY MAINTENANCE

- TECHNICAL COMPARTMENT FOR EASY ACCESS TO ROTOR SHAFT, VERTICAL FILLING PLUG AND EXPANSION TANK.
- HAS A PRACTICAL HOUSING FOR MAINTENANCE TOOLS AND INSTRUCTION MANUAL.
- EASY TO SERVICE INTERNAL NON-RETURN VALVE WITH SPECIAL TOOL PROVIDED.


### SILENT OPERATION

- ULTRA LOW NOISE BY WATER COOLED MOTOR & SOUND PROOF CASING TO 45dB.
- ANTIVIBRATION FEET ABSORB ANY NOISE - PREVENT VIBRATIONS.
- WIRELESS CONNECTION (E.SYBOX ONLY) FOR MULTIPLE PUMP INSTALLS.

Model	P2	1 ph In	Water Temp	Connections		Weight	Dimensions			Taps
				kW	A		°C	Inlet	Outlet	
DAB-E.SYBOX	1.55	10	0/40	1" BSPF	1" BSPF	24.8	263	362	564	12


Operating Conditions	
System Pressure	Max. 8 bar (800 kPa)
Liquid Temperature	0°C to +40°C
Maximum Ambient Temperature	+50°C

Electrical Data	
Voltage	1 x 240V, 50 - 60 Hz
Protection Level	IP 44
Insulation Class	F

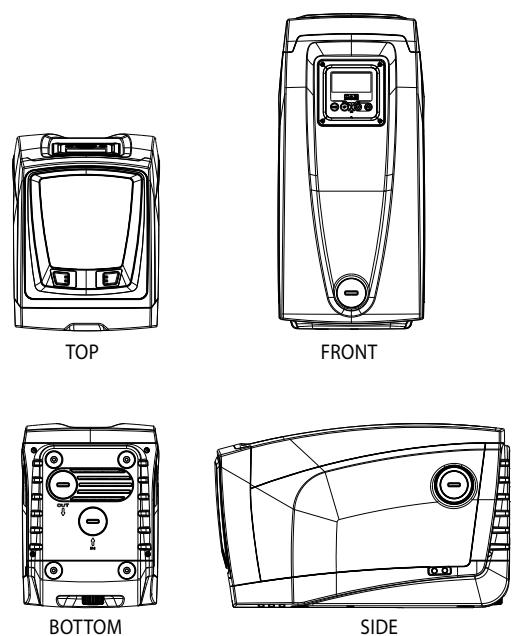


Construction	
Materials	<ul style="list-style-type: none"> <li>Composite outer casing</li> <li>Stainless steel shaft</li> <li>Technopolymer impeller and diffusers</li> </ul>

## MAXIMUM VERSATILITY 3 INSTALLATION POSITIONS

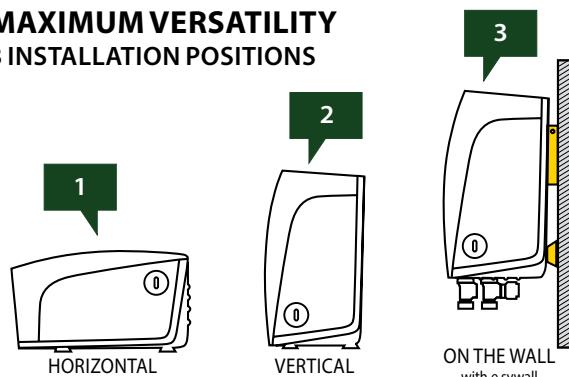


Horizontal, vertical or wall mounted, e.sybox can be installed virtually anywhere inside or outside the home.

### Performance Curve:

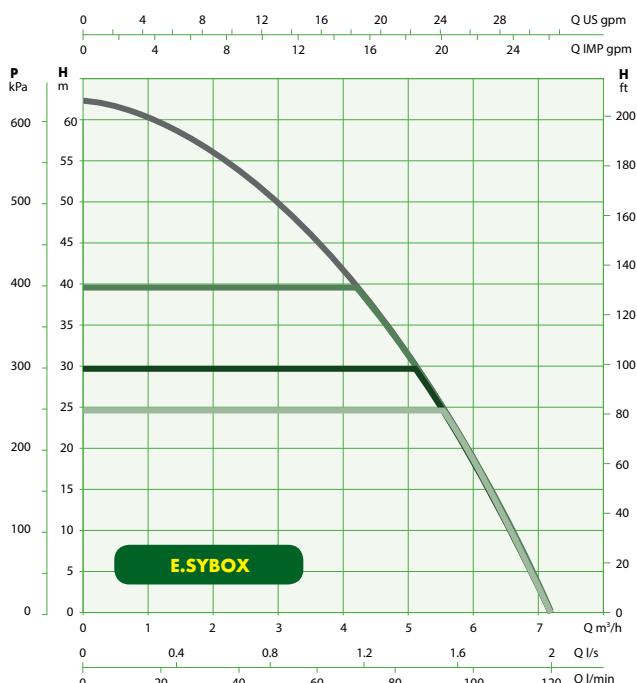

### Energy Saving Curve:

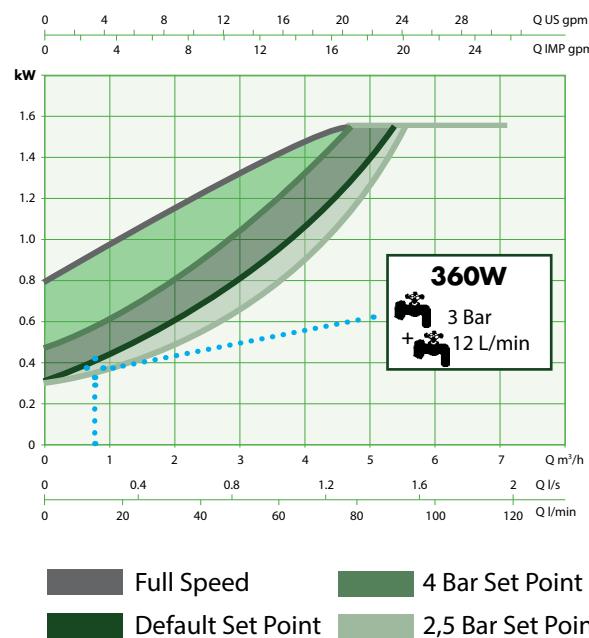



# ELECTRONIC Water Pressure System

## E.SYBOX MINI<sup>3</sup>

DAB-ESYBOXMINI<sup>3</sup> - 805406



E.SYBOX MINI<sup>3</sup> is the DAB compact automatic pressurisation system for the water supply of a single dwelling.

E.SYBOX MINI<sup>3</sup> guarantees the comfort of constant pressure (Pressure Set Point adjustable from 1 up to 5.5 bar) inside the system, and energy savings thanks to the inverter technology.

Suitable for use with drinking water, in domestic systems, and in gardening applications. E.SYBOX MINI<sup>3</sup> does not require any additional components for its installation.



### FEATURES

It consists of a high frequency self-priming multistage pump, management inverter electronics, pressure and flow sensors, adjustable high resolution LCD display with 1 litre built-in expansion vessel, and cartridge check valve.

The double suction and delivery ports allow both vertical and horizontal installation.

Thanks to its compact size and water cooled motor, installation is possible in small places with low air flow.

The E.SYWALL wall bracket allows wall installation, saving even more room.

E.SYBOX MINI<sup>3</sup> is a self-priming pump with a capability of 8 metres.

The water cooled motor, the anti-vibration feet and the electronics, make this product totally comfortable and compact.

Fitted with safety protections including dry run and antifreeze protection.

All the parameters and the operating status can be displayed and set on the high resolution LCD display.

#### COMFORTABLE

- GUARANTEES CONSISTENT WATER PRESSURE
- ULTRA LOW NOISE
- NO VIBRATIONS
- REDUCED ENERGY CONSUMPTION

#### VERSATILE

- EXTREMELY COMPACT SIZES
- INSTALLATION OPTIONS: HORIZONTAL, VERTICAL
- WALL INSTALLATION THANKS TO E.SYWALL

#### SIMPLE

- QUICK TO INSTALL
- EASY TO ADJUST
- EQUIPPED WITH A LARGE DISPLAY
- EASY MAINTENANCE



ANTI-FREEZE PROTECTION



Model	P1	1 ph In	Water Temp	Connections		Weight	Dimensions			Taps
							W	D	H	
DAB-E.SYBOXMINI <sup>3</sup>	0.85	4.8	40	1"BSPF	1"BSPF	14.6	236	263	439	8

Operating Conditions	
System Pressure	7.5 Bar (750kPa)
Liquid Temperature	0° to + 40° C
Maximum Ambient Temperature	+50° C

Electrical Data	
Voltage	240 V
Protection Level	IP X4
Insulation Class	F

KEY FEATURES		
1. Increased maximum performance with set point adjustable between 1.0 and 5.5 bar.		
2. Reduced sound down to 45 dB(A) for 10 l/m at 2.7 bar.		
3. Factory setpoint optimized at 2.7 bar		

Construction	
Materials	<ul style="list-style-type: none"> <li>Composite outer casing</li> <li>Stainless steel shaft</li> <li>Technopolymer impeller and diffusers</li> </ul>

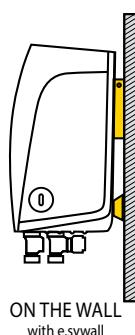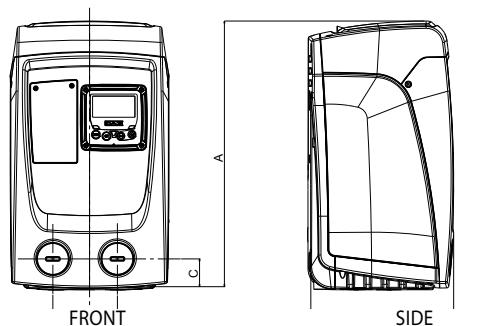


### MAXIMUM VERSATILITY



E.SYBOX MINI<sup>3</sup> can also be wall mounted inside or outside the home.



\*dutypoint 10 l/m at 2.7 bar at 1m

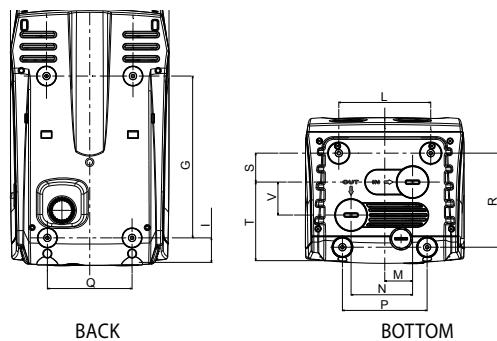


ON THE WALL  
with e.sywall

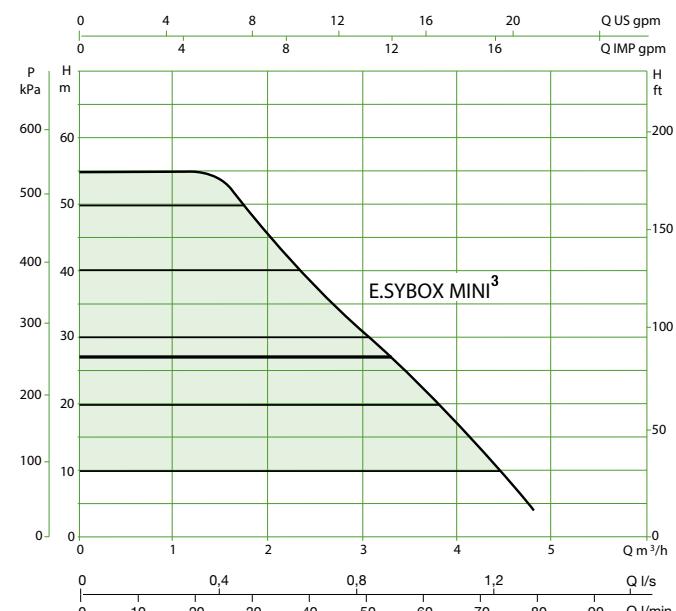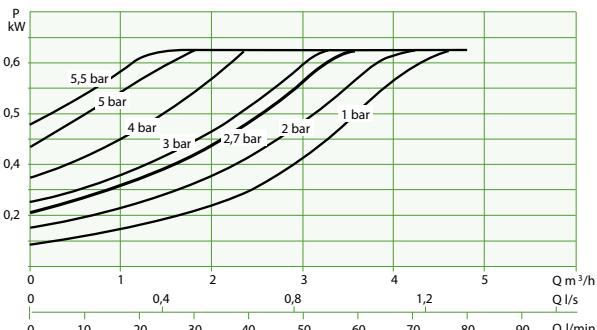

# Features & Benefits

## E.SYBOX & E.SYBOX MINI<sup>3</sup>

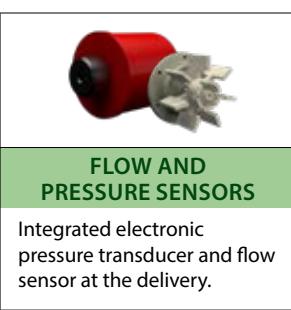

## e.sydock

DAB-ESYDOCK - 801120 (ESYBOX ONLY)

**E.SYDOCK** makes installation rapid, easy and flexible.

- 4 plumbing configuration options
- Complete with all interfaces required for connection
- Rapid disconnect function for easy maintenance
- Incorporates anti-vibration feet
- 1 1/4" suction and delivery fittings
- 293L x 318D x 180H E.SYDOCK
- 293L x 345D x 679H with E.SYBOX installed



## e.sywall

DAB-ESYWALL - 801122

**E.SYWALL** mounting bracket

- Comes with brackets, screws and dowels
- Includes two accessories for absorption of vibrations



## e.sytwin

DAB-ESYTWIN - 801121 (ESYBOX ONLY)

**E.SYTWIN** is the evolution of E.SYDOCK, creating connection between two pumps.

**A better, longer life**


- E.SYTWIN ensures constant water supply thanks to the BACKUP function.
- The new software algorithms constantly analyse the operation of the system, thus optimizing alternating use of the two units.

**More power, less space**

- E.SYTWIN offers exceptional performance thanks to combined operation with a 50% reduction in size compared to traditional units.

**Everything you need**

- The wireless interface handles communication between the two units
- Ensures hydraulic connection without need for additional components for installation and operation
- Group operation visible on every display.
- 1 1/4" suction and delivery fittings
- 752L x 358D x 230H E.SYTWIN
- 752L x 358D x 730H with E.SYBOX installed

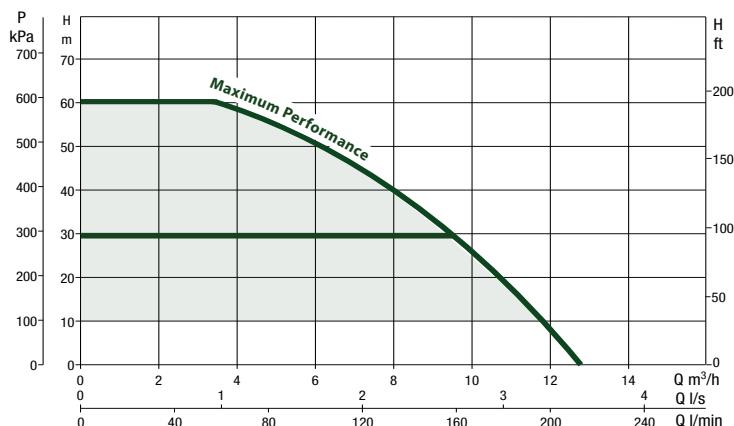

## **e.sylink kit**

**DAB-ESYLINK KIT - 802435 (ESYBOX ONLY)**

### **Wireless connection for DAB E.SYBOX**

One E.SYLINK will communicate with a group of DAB-E.SYBOX pumps. Easily upgradeable via a computer. Can be installed on DIN modules in standard electrical boxes (size 6 modules). LED for status indication and alarms. Includes E.SYLINK, USB cable, electrical box 8DIN, power supply and 3 cable gland.



## **e.sytank**

### **Water storage tank ready for use**

**DAB-ESYTANK - 805121 (ESYBOX ONLY)**

480 litre tank provided with e.sydock for quick installation. It is suitable for potable water and is equipped with a filling valve from the water supply (complies with UNI EN 1717), with AG type overflow system, suction hose with bottom valve and discharge hose.

The tank is suitable for installation above ground and the four slots on the base facilitate fixing to the ground. It is equipped with direct discharge from the tank.

The system is modular with the ability to install additional tanks on three sides (laterally and to the rear).



## **e.sypumpcover**

**DAB-ESYPUMPCOVER - 804871**


**Strong and durable pump cover to suit DAB ESYBOX and ESYBOXMINI3 horizontal mount.**

- Heritage Green colour.
- 700L x 450W x 560H mm.



# Notes

**E.sy**<sup>app</sup>

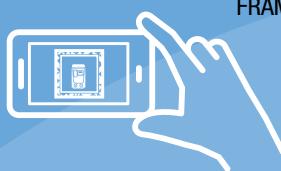


DOWNLOAD THE APP,  
FRAME AND DISCOVER  
THE AUGMENTED  
REALITY

Available on the iPhone  
App Store

ANDROID APP ON  
Google play



**View the E.sybox  
Promotional Video  
on youtube:**



**Available from your DAB distributor:**

**WHITE INTERNATIONAL PTY LTD**

60 Ashford Ave Milperra NSW 2214  
PO Box 304 Milperra NSW 2214  
Phone 02 9783 6000 Fax 02 9783 6001  
Customer Service 1300 783 601  
Email Sales: [pumpsales@whiteint.com.au](mailto:pumpsales@whiteint.com.au)  
[www.whiteint.com.au](http://www.whiteint.com.au)

**WHITE INTERNATIONAL NZ LTD**

15G Kerwyn Avenue  
East Tamaki, Auckland 2013, New Zealand  
Phone 09 579 9777 Fax 09 579 7775  
Customer Service 0800 509 506  
Customer Service Fax 0800 804 344  
Email Sales: [sales@whiteint.co.nz](mailto:sales@whiteint.co.nz)  
[www.whiteint.co.nz](http://www.whiteint.co.nz)

**Please always refer to our website for further  
technical information & new product innovations**

**Disclaimer:** Every effort has been made to publish the correct details in this brochure.  
No responsibility will be taken for errors, omissions or changes in product specifications.  
Product images are representations only.

 **WHITE**<sup>®</sup>  
INTERNATIONAL

Scan QR Code on your  
smart phone or iPad to  
save a digital version.



P/I\_AUS/NZ\_P\_DAB\_ESYLINE\_BR\_2019