


50-125/2.2 (2.2kW) MEI > 0.60 – impeller diameter = 126 mm
 50-125/3.0 (3.0kW) MEI > 0.60 – impeller diameter = 131 mm
 50-125/4.0 (4.0kW) MEI > 0.60 – impeller diameter = 140 mm

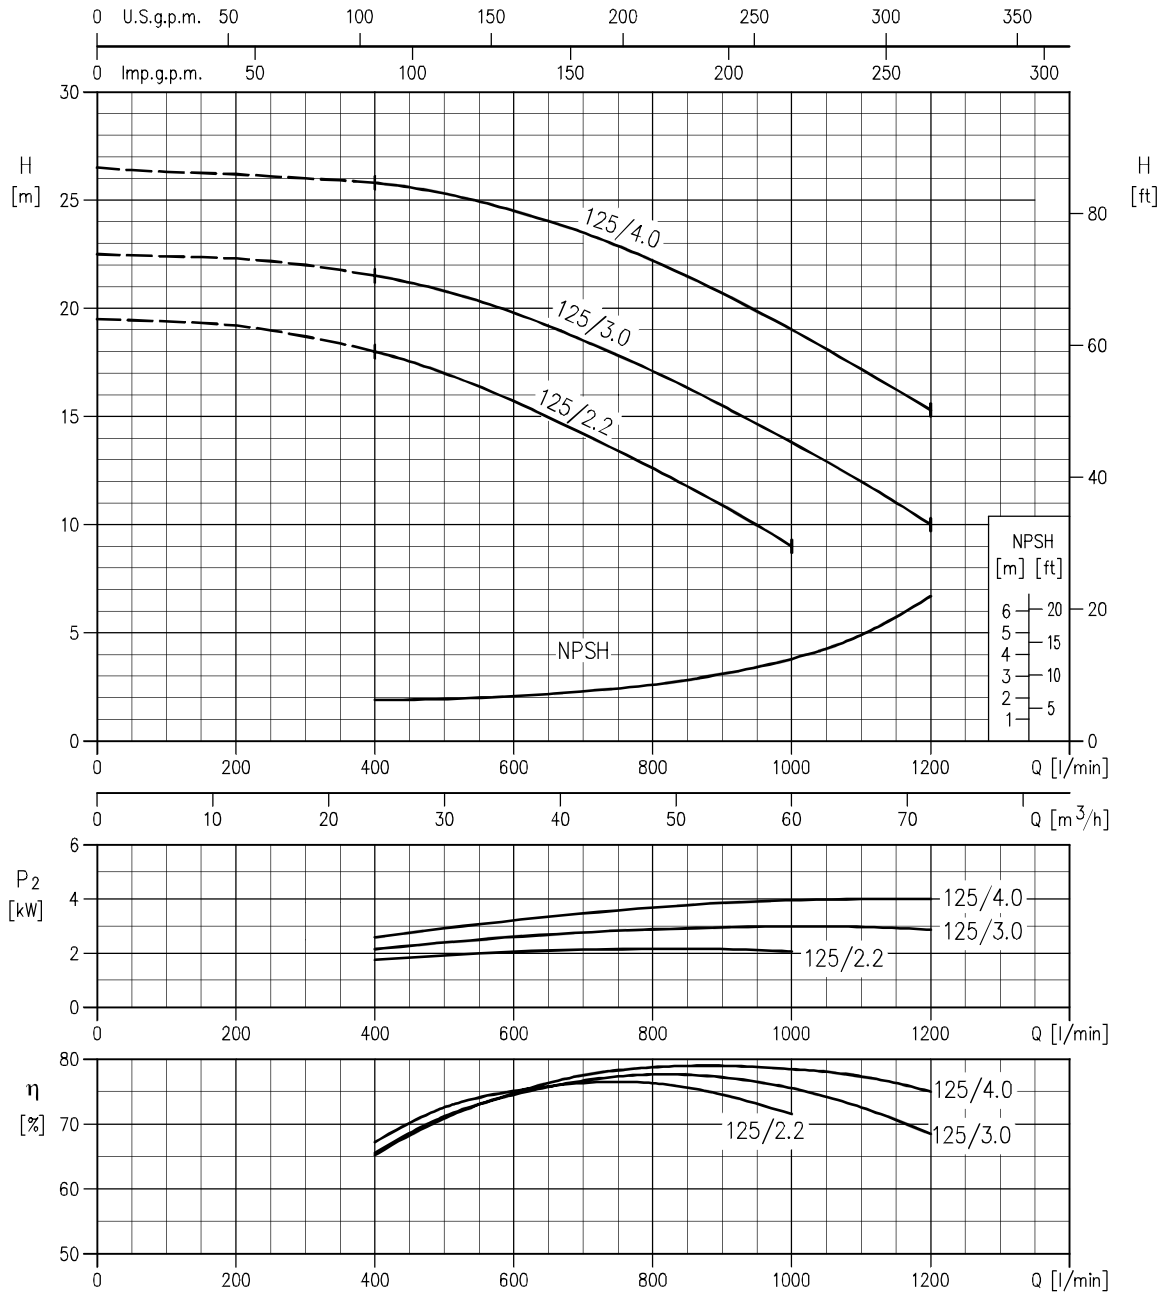

Rotation speed ≈ 2900 min⁻¹
 Test standard: ISO 9906:2012 - Grade 3B