


40-125/1.5 (1.5kW) MEI > 0.70 – impeller diameter = 125 mm
 40-125/2.2 (2.2kW) MEI > 0.70 – impeller diameter = 140 mm

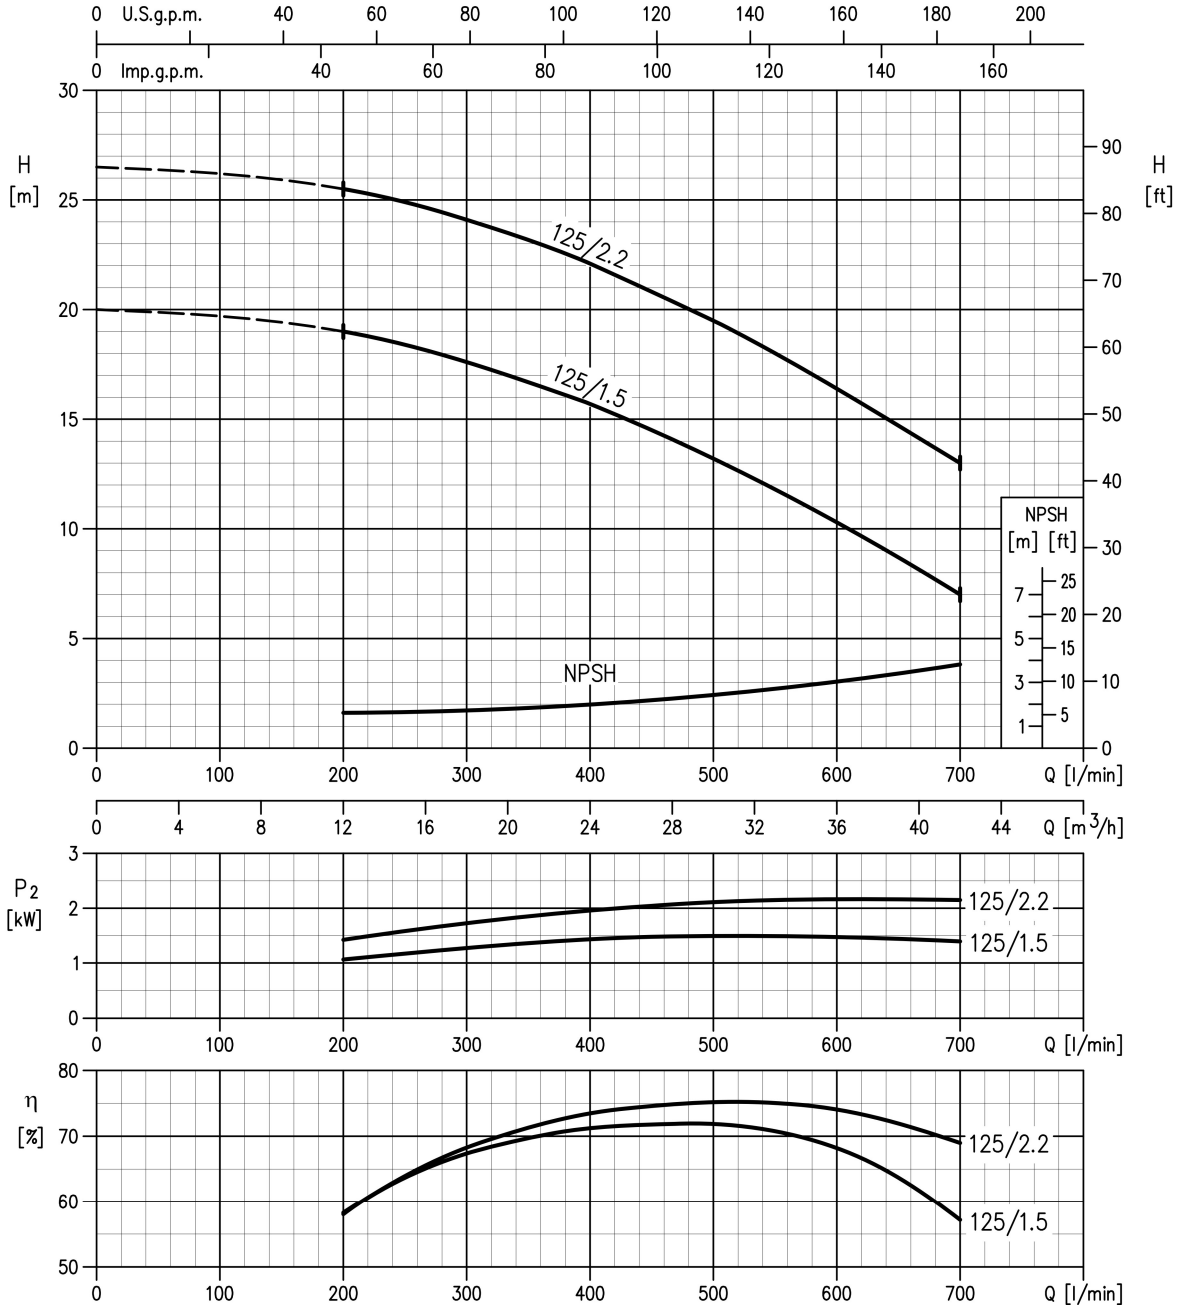

Rotation speed ≈ 2900 min⁻¹
 Test standard: ISO 9906:2012 - Grade 3B