



Technical specification



Installation: P - Semi permanent, Wet

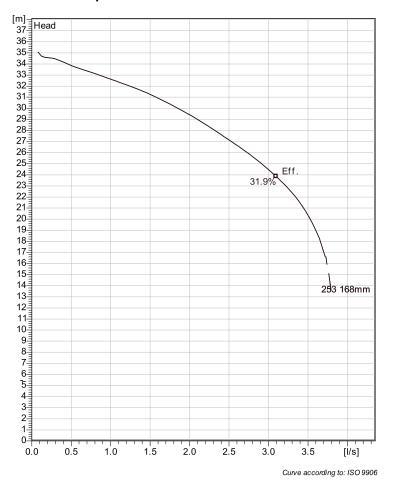

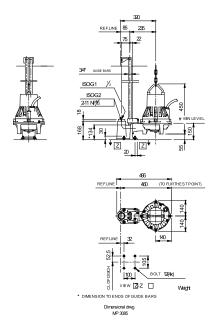



Note: Picture might not correspond to the current configuration.

General
Semi-open multi-channel impellers with integral grinder cutter in single volute casing for liquids containing solids and fibres.

Impeller	
Impeller material	Grey cast iron
Outlet width	40 mm
Inlet diameter	80 mm
Impeller diameter	168 mm
Number of blades	6

Motor Motor # Stator v ariant Frequency	M3085.172 15-09-2AL-W 2,4KW
Rated voltage	230 V
Number of poles Phases	2 3~
Rated power	2.4 kW
Rated current Starting current	8.1 A 48 A
Rated speed	2840 rpm
Power factor	
1/1 Load 3/4 Load	0.92 0.89
1/2 Load	0.82
Efficiency	
1/1 Load 3/4 Load	80.5 % 82.5 %
1/2 Load	82.0 %

Configuration

Project	Project ID	Created by	Created on	Last update
			2012-10-25	




Performance curve

Pump

Outlet width Inlet diameter Impeller diameter Number of blades 40 mm 80 mm 168 mm

Motor

Motor# M3085.172 15-09-2AL-W 2,4KW Power factor Stator variant 0.92 1/1 Load Frequency
Rated voltage
Number of poles
Phases 50 Hz 230 V 2 3/4 Load 0.89 1/2 Load 0.82 Efficiency 3~ Rated power
Rated current
Starting current
Rated speed 2.4 kW 8.1 A 80.5 % 1/1 Load 3/4 Load 82.5 % 48 A 1/2 Load 82.0 % 2840 rpm

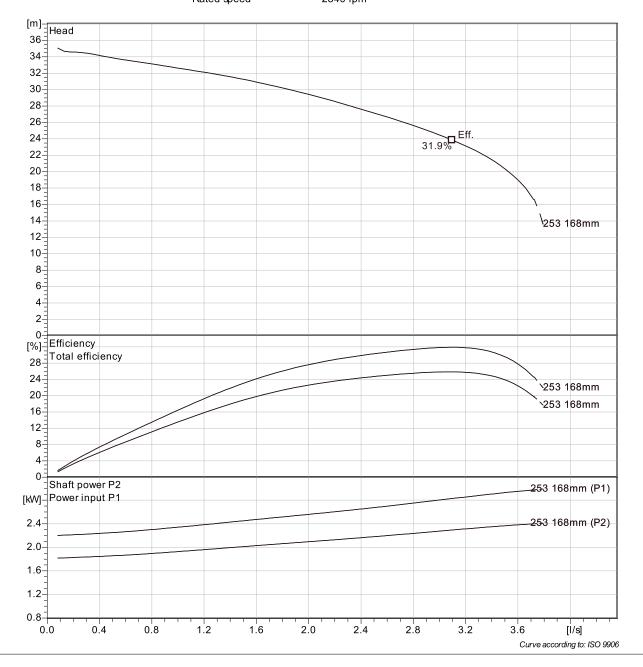


Project	Project ID	Created by	Created on	Last update
			2012-10-25	



Duty Analysis



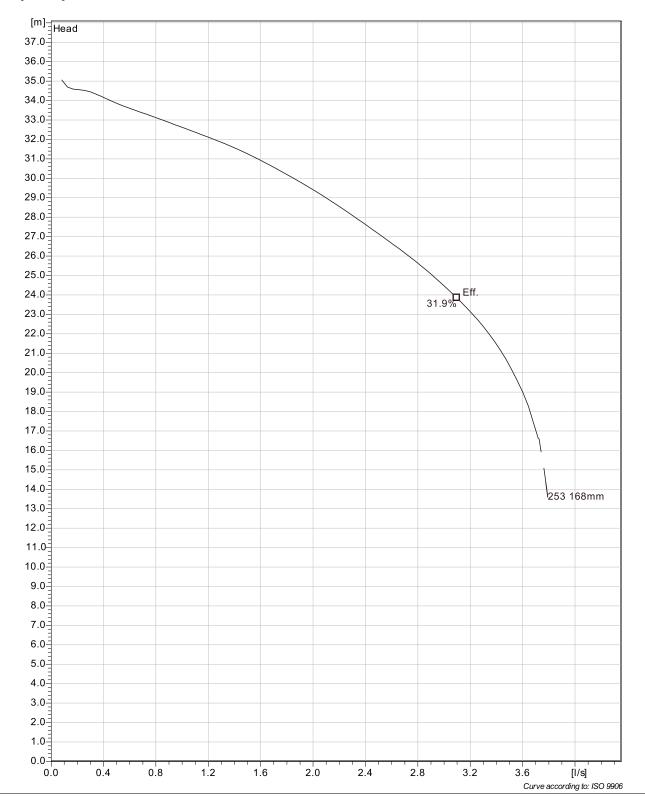



Project	Project ID	Created by	Created on	Last update
			2012-10-25	




Dimensional drawing



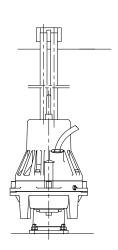

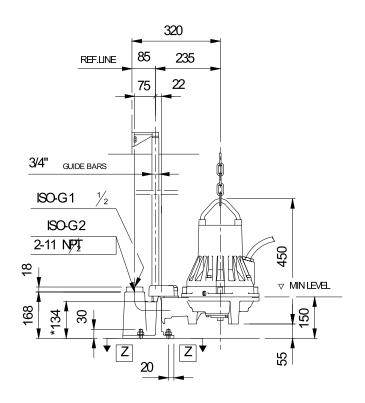

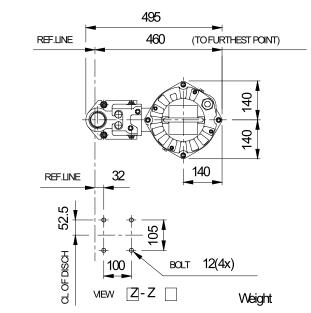

* DIMENSION TO ENDS OF GUIDE BARS

Dimensional drwg MP 3085

Project	Project ID	Created by	Created on	Last update
			2012-10-25	