

MHQP Constant Pressure System

FPS

MH series

MHQP

Applications:

- Boosting
- Water Transfer
- Commercial Sprinkler Systems
- Industrial
- Residential Sprinkler Systems
- Rainwater
- Wash Down Units
- Commercial Water Features
- Tanks
- Reverse Osmosis
- Aeration

Specifications:


- Compact close-coupled design, robust and rust resistant
- Asynchronous, TEFC, Class F insulation, IP55 protection motor
1 phase VSD with built in thermal protection coupled to a 3 phase motor
- 300 series stainless steel on all hydraulic components
- Drive-Tech VFD by Franklin Electric
- 10 amp 3 pin plug with 2 metre lead
- Capacities up to 8 m³/h at 50 Hz
- Capable of heads up to 7.5 bar at 50 Hz
- Heavy duty oversized motor shaft
- Suction Inlet - 1.25" BSP MH5
- Discharge Outlet - 1" BSP MH5
- Maximum working pressure 10 bar
- Maximum ambient temperature 40 °C
- Liquid temperature range from -15 to 110 °C
- Easy maintenance
- Made in Italy
- Approved by Brisbane City Council
- Complies with AS/NZS4020 Drinking Water



MHQP

FPS

Performance curve 20 to 50 Hz, FPS MHQP

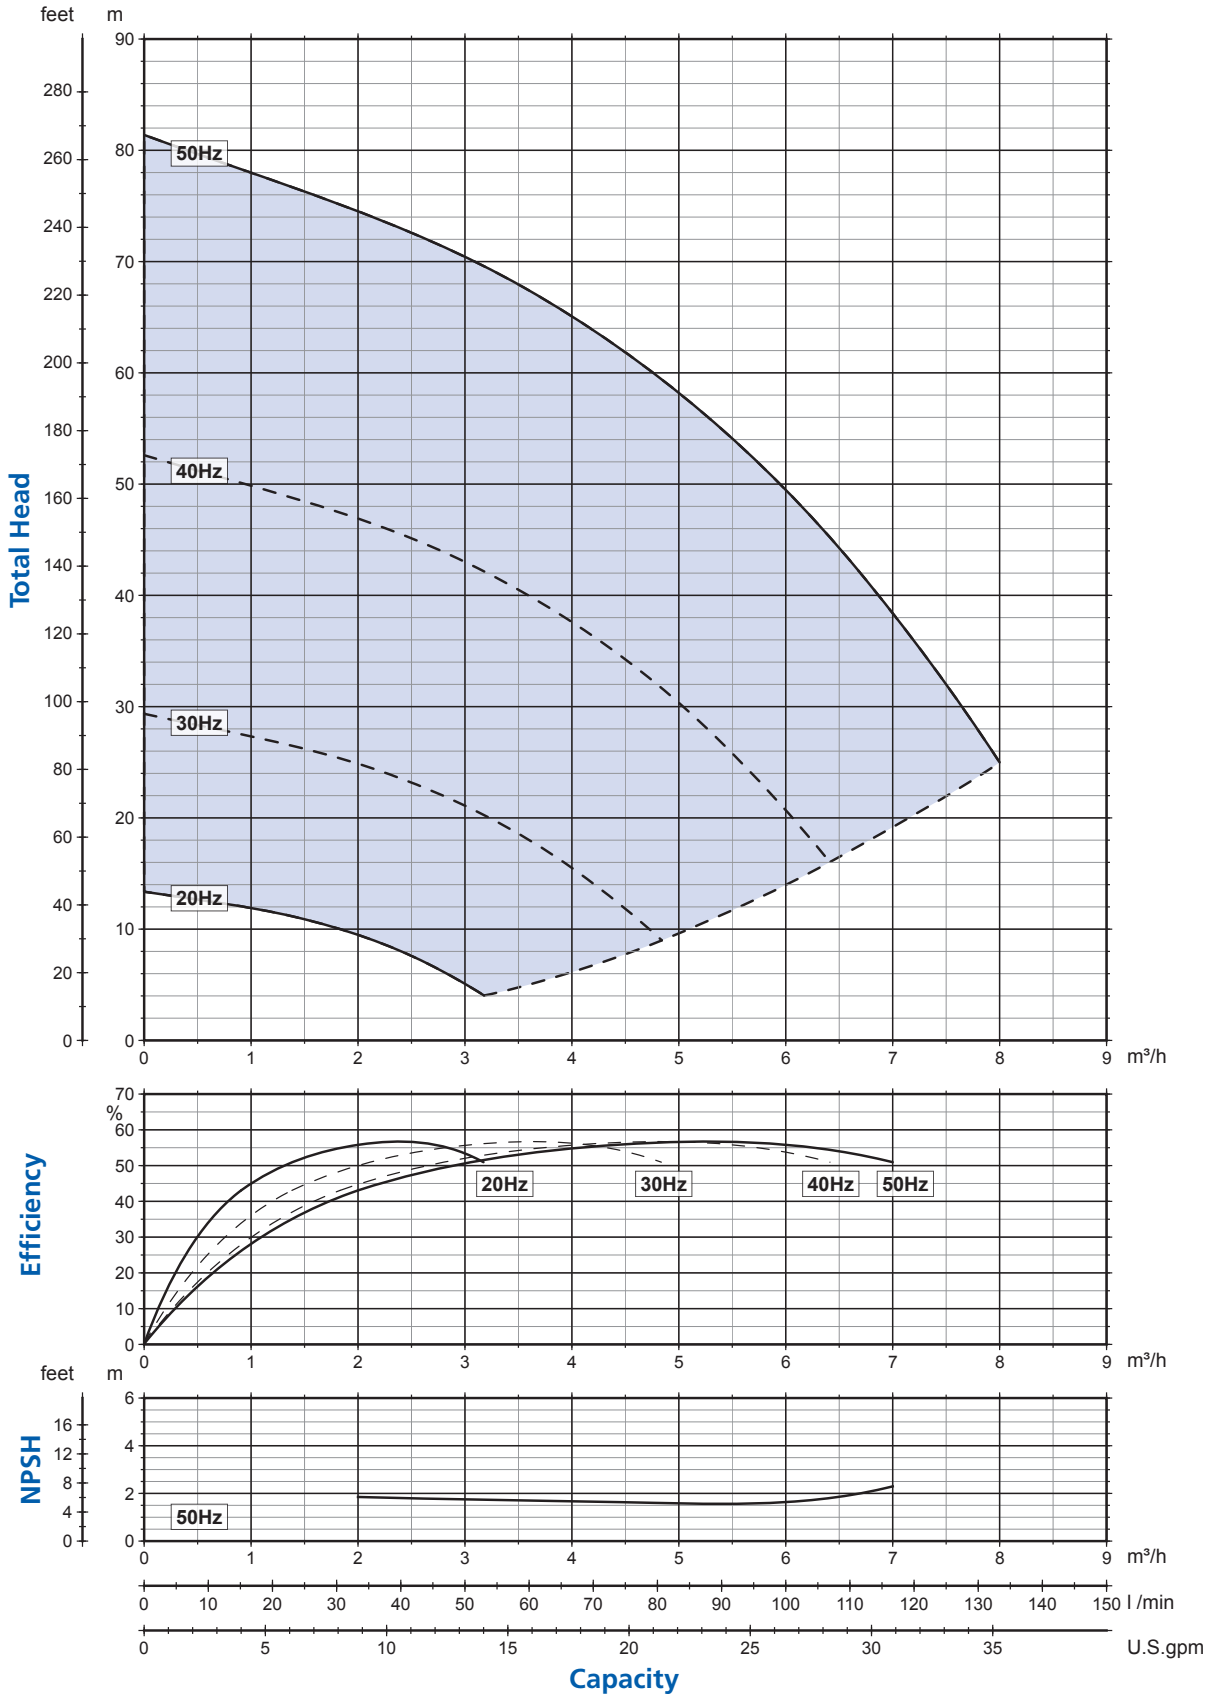

UNITED STATES

Franklin Electric Co, Inc
9255 Coverdale Road
Fort Wayne, IN 46809

Phone: +1.260.824.2900
Fax: +1.260.824.2909

AUSTRALIA / NEW ZEALAND

Franklin Electric (Aust) Pty Ltd
106-110 Micro Circuit
Dandenong South, Vic 3175

Toll Free: 1300 FRANKLIN
1300 372 655

Tel: +61 3 9799 5000
Fax: +61 3 9799 5050



Franklin Electric
www.franklinwater.com/au