




# MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50
	ST. MFD		RUN MFD	
	TEST PR	8322	PAGE	3-D
	APPR BY	<i>AI</i>	DATE	4-15-93

RATING	FRAME	4 INCH SUB	HP	5.5
	MODEL	234593	VOLTS	380-415
	RPM	2875	PHASE	3
	S.F.	1	HERTZ	50
TYPE		3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

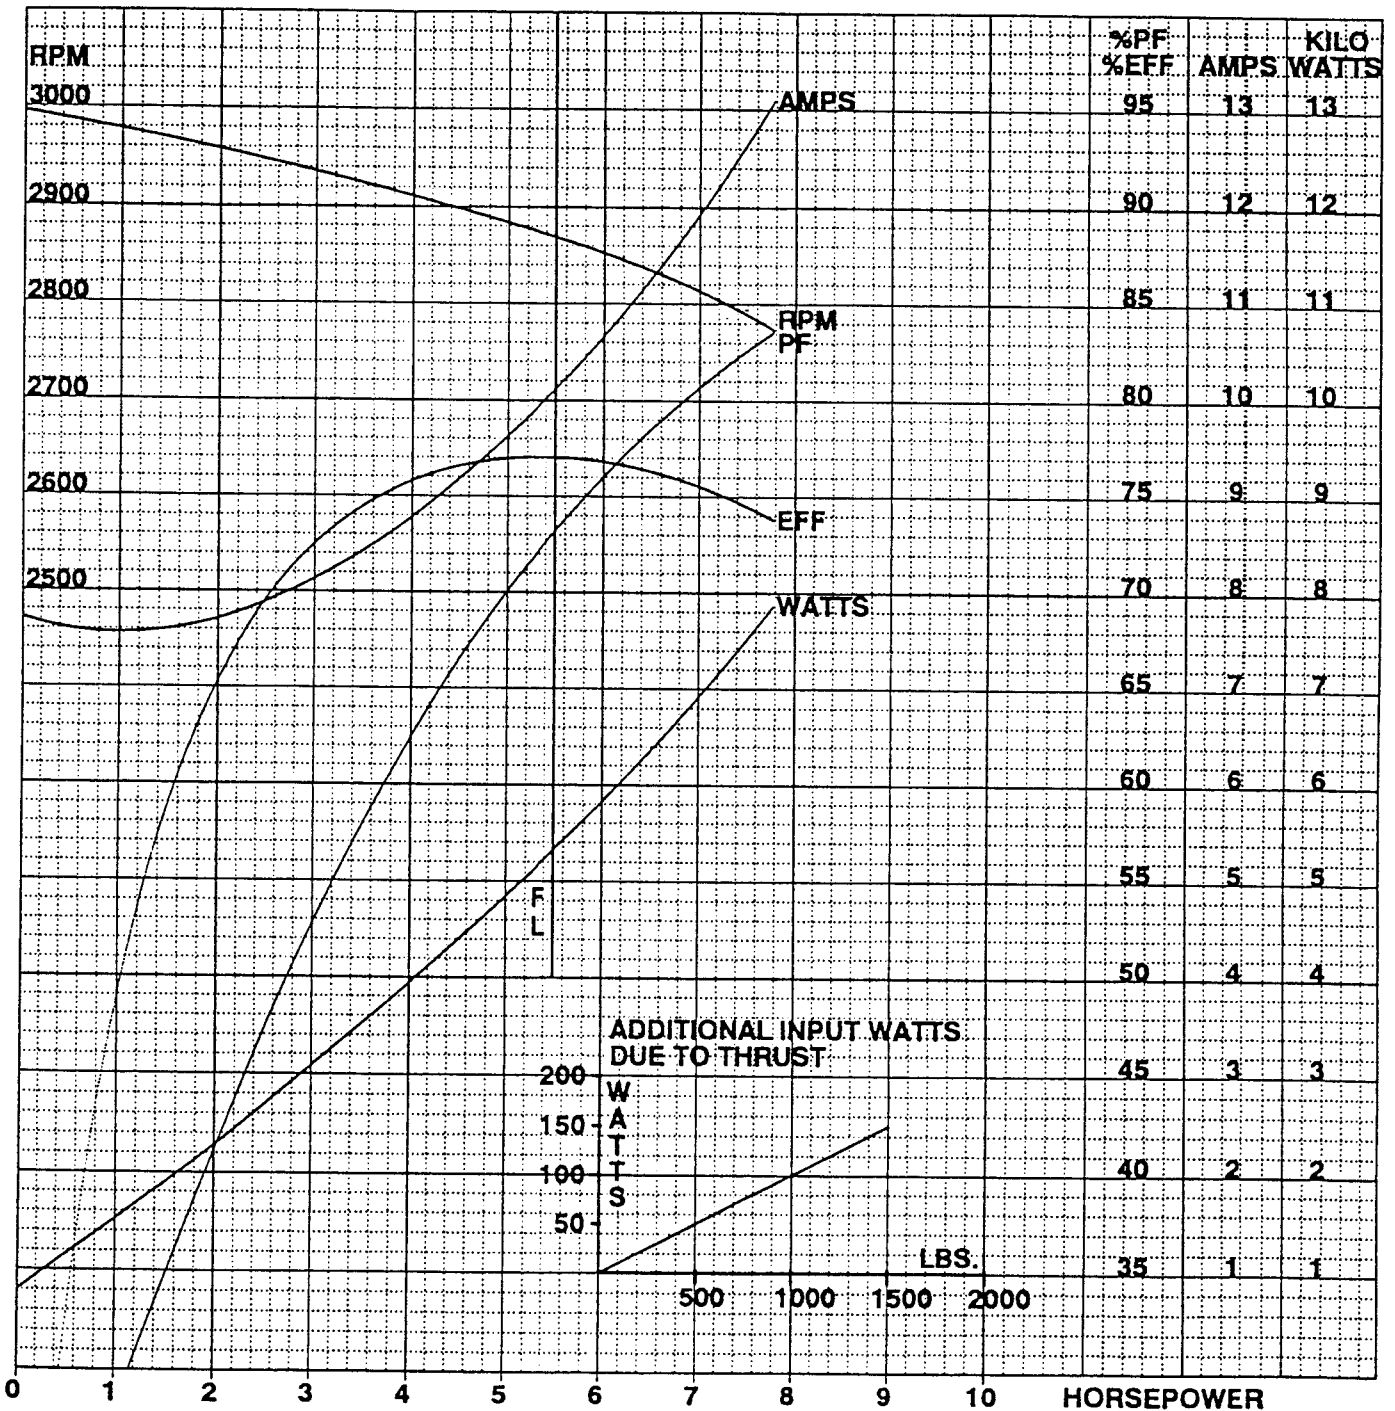

FULL LOAD TORQUE 120.8 LB-IN  
 BREAKDOWN TORQUE 410 LB-IN  
 LOCKED ROTOR TORQUE 440 LB-IN  
 LOCKED ROTOR AMPS 60

CURVE NO. 337931-702