




# MOTOR PERFORMANCE CHARACTERISTICS

TEST	VOLTS	415	HERTZ	50	RATING	FRAME	4 INCH SUB	HP	7.5
	ST. MFD		RUN MFD			MODEL	234528	VOLTS	380-415
	TEST PR	8296	PAGE	8-D		RPM	2875	PHASE	3
	APPR BY	JN	DATE	4-15-93		S.F.	1	HERTZ	50
						TYPE	3 PHASE		

REMARKS: TESTED IN WATER, SHAFT UP, WITH NO APPLIED THRUST.  
TYPICAL PERFORMANCE. NOT GUARANTEED AS MINIMUM PERFORMANCE.

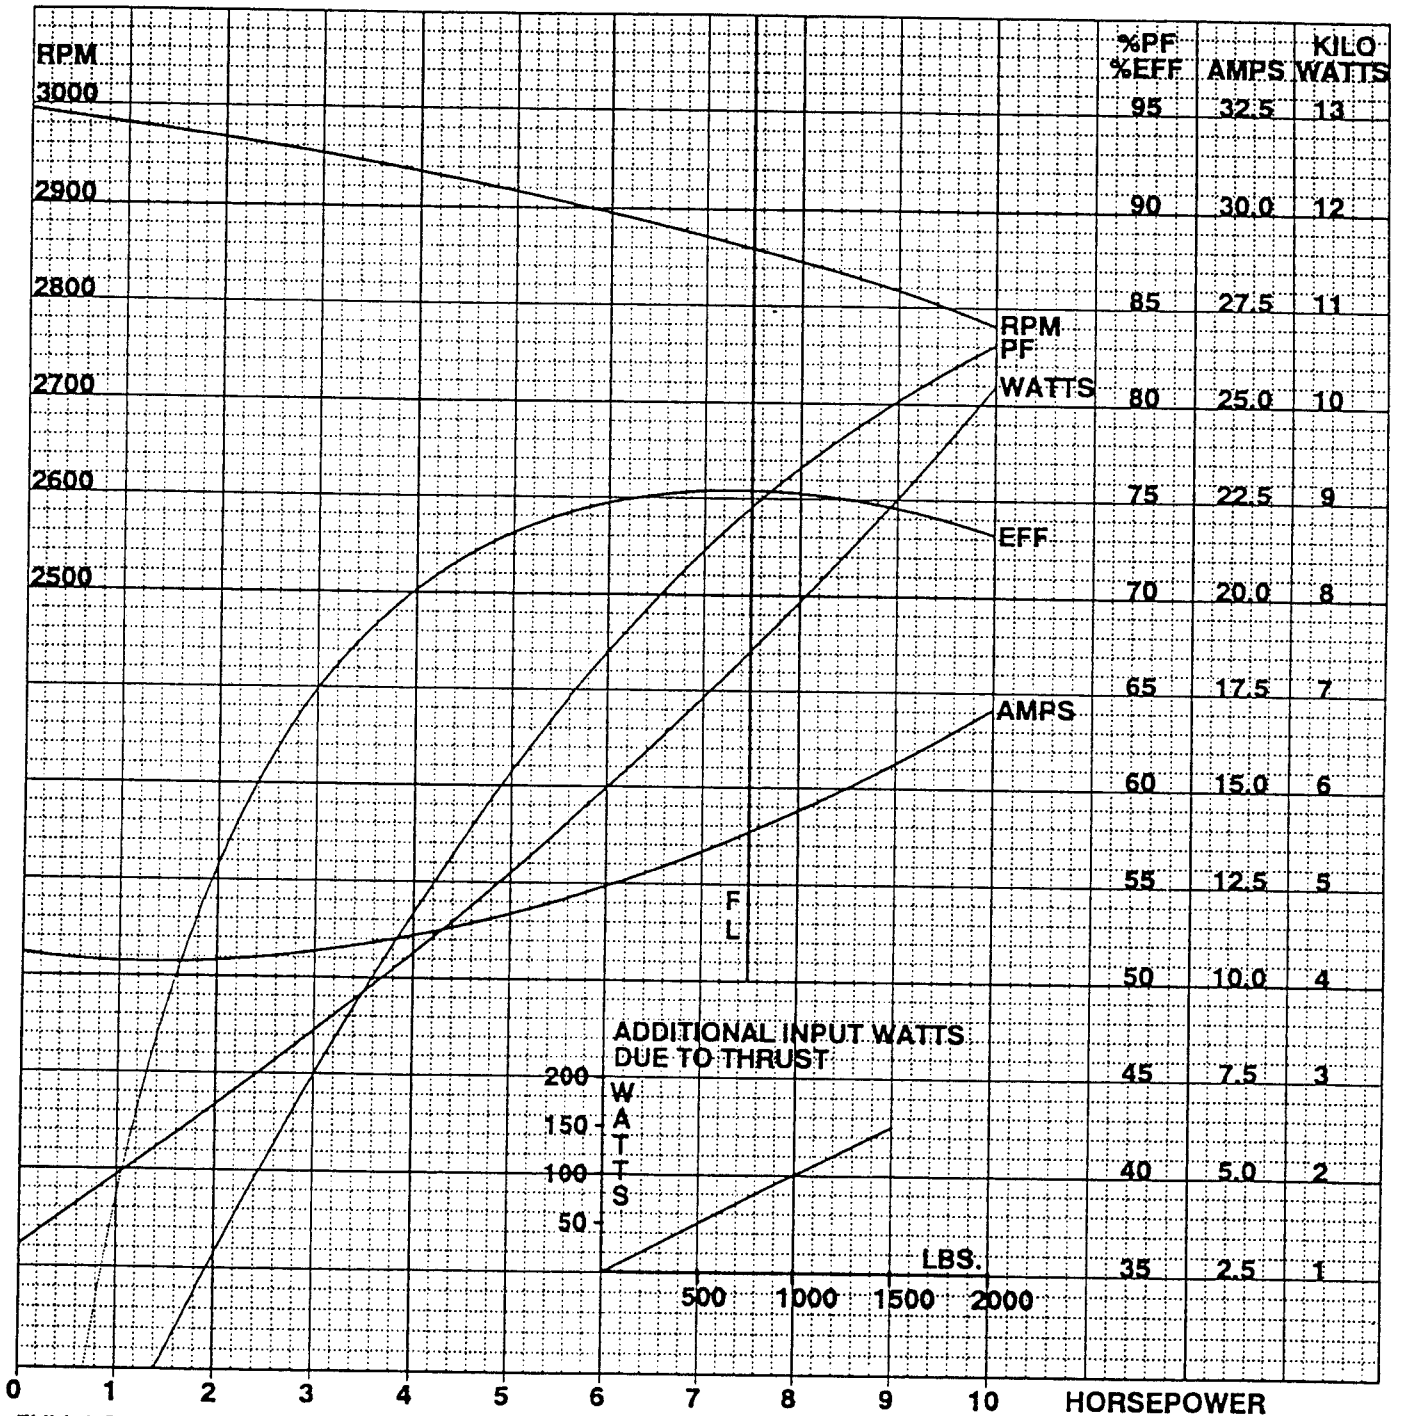

FULL LOAD TORQUE 165.3 LB-IN  
 BREAKDOWN TORQUE 575 LB-IN  
 LOCKED ROTOR TORQUE 495 LB-IN  
 LOCKED ROTOR AMPS 79

CURVE NO. 337611-702