


Electric submersible pumps with cutter system for sewage and effluent.

Barracuda GRP 16-50

Performance

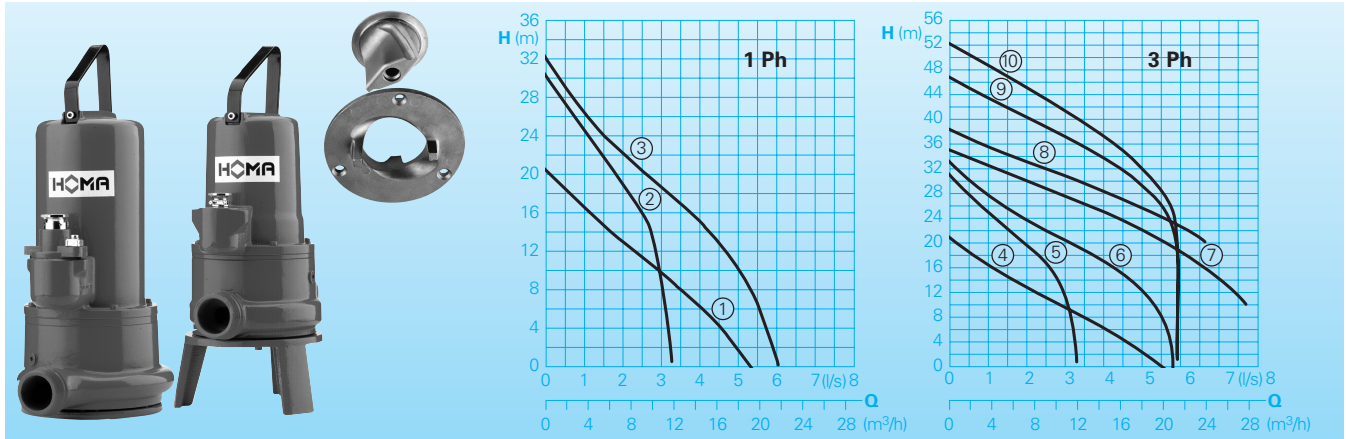

Application

The installation of conventional sewer systems in areas of low population like small villages, farms or under difficult topographic conditions is often extremely expensive, mainly because of the high cost for large diameter pipework installation. HOMA provides the perfect, economical alternative with Barracuda grinder pump pressure sewage systems. The Barracuda pumps cut all solids present in the sewage into small particles. This allows the use of pipes from 1 1/2" diameter, which can be easily laid at low cost with a minimum of construction work.

DIN EN 12050-1: Conformity and design approved and controlled by LGA.

Installation: Transportable or permanent. Models with float switch control for automatic pump operation, depending on liquid level in the sump.

Pumped liquid: Waste water or sewage containing soft solids. Max. liquid temperature: 40°C, short term up to 60°C.

Operation: Permanent (S1).

Design

Fully submersible, compact integrated motor-pump consisting of:

Pump: Single stage centrifugal pump with horizontal discharge BSP 2" M.

Impeller/Cutter: Open multi-channel impeller. Cutter system at pump inlet consisting of stationary cutter ring and blade rotor.

Motor: Fully submersible, pressure-tight electric motor, single or three phase. Thermal sensors embedded in stator winding. Insulation class H, degree of protection IP 68. Motor start: GRP 16 - 36: direct-online GRP 44 - 50: start-delta-start
Cable: GRP16W: H07RN-F4G1,5 |

Technical Data

Curve No.	Pump type	Motor		Operation/Start Capacitor* (µF)	Speed (rpm)	Nominal current (A)	Weight (kg)
		P ₁ (kW)	P ₂ (kW)				
①	GRP 16 (B) W (A) (Ex)	1,5	1,1	30/60	2900	7,5	27
②	GRP 20 W (A) (Ex)	2,1	1,5	50/100	2900	9,5	33
③	GRP 26 W (A) (Ex)	2,5	1,8	50/100	2900	11,5	33
④	GRP 16 (B) D (A) (Ex)	1,3	0,9		2900	2,5	27
⑤	GRP 20 D (A) (Ex)	2,1	1,6		2900	3,5	33
⑥	GRP 26 D (A) (Ex)	2,5	1,9		2900	4,4	33
⑦	GRP 36 D (A) (Ex)	3,7	3,1		2900	6,4	44
⑧	GRP 36 HD (A) (Ex)	3,7	3,1		2900	6,4	44
⑨	GRP 44 D (Ex)	4,4	3,7		2840	7,5	56
⑩	GRP 50 D (Ex)	5,2	4,4		2840	8,7	56

Model W: 230-240V/1Ph 50Hz

Model D: 400-415V/3Ph 50Hz

* **Capacitor:** For the operation it is necessary to install a capacitor in the control box.

Model GRP 16 B: with base stand

Model A: with automatic level control HOMA-Nivomatik

Model Ex: explosion proof

GRP16D: H07RN-F7G1,5 | GRP20-36: H07RN-F7G1,5 | GRP16-36EX: H07RN-F PLUS 6G1,5 | GRP44-50(EX): H07RN-F(-PLUS)10G1,5 **Shaft/Bearing:** Large diameter stainless steel rotor shaft, heavy duty pre-lubricated bearings.

Seals: GRP 16 with combination of mechanical seal (silicon-carbide/ silicon-carbide) and lip seal in oil chamber. Models from GRP 20 with two mechanical seals (silicon-carbide/ silicon-carbide) in oil chamber, oil inspection from outside. Seal condition monitoring probe on request.

Explosion protection: All Models available with explosion proof motors according to $\text{Ex c d II B T4(T3)}$

Materials

Motor housing, Pump housing, impeller	Gast iron EN-GJL-250
Rotor shaft, screws	Stainless steel
Cutter System	Stainless steel 1.4122 - 55HRC
Mechanical seal	Silicon-carbide
O-rings	Perbonane

Equipment supplied


Model W (230-240 V/ 1 Ph): 10 m of cable. Control box W19 (GRP16W); WT19 (GRP26-36W) available as accessories.

Model D (400-415 V/3 Ph): 10 m of cable. Control box DT32 available as accessories.


Model A: With additional automatic level control, with AS float switch, control box WA10/19; DA10/32; DA10/12 with overload protection, manual-auto-switch, and 10 m of cable. The single phase (1Ph) pumps are furthermore provided with integrated condensers and connector. The three phase (3Ph) pumps are equipped with a CEE reversing plug for rotational direction.

Model GRP 16 B: With mounted base stand.


GRP 16 B (Ex)

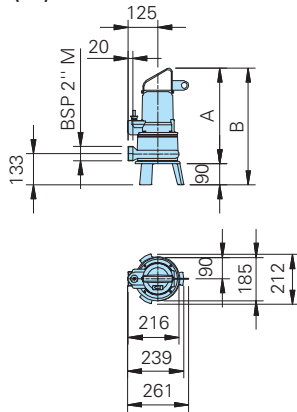


GRP 20-50 (Ex)

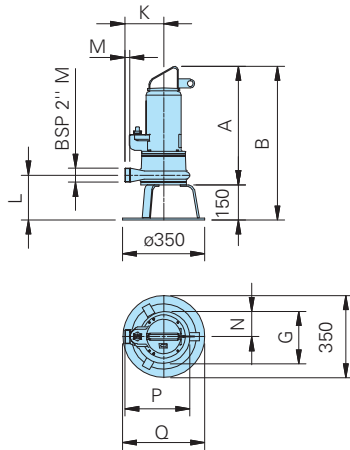

GRP 16 (Ex)

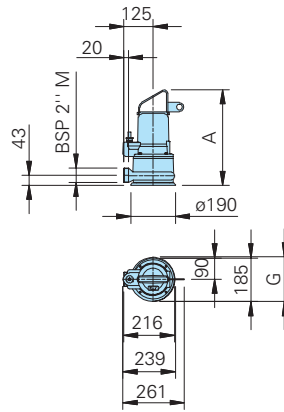


Permanent sump installation

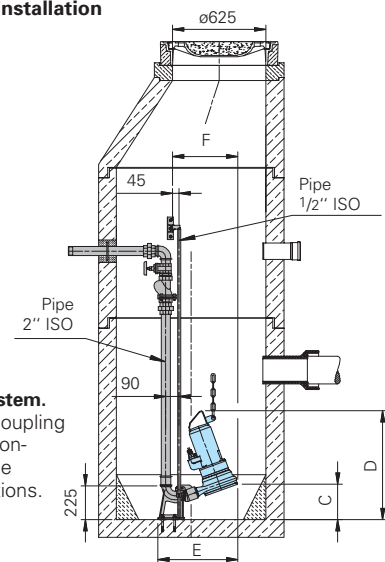


Permanent sump installation with auto-coupling system.

Permanent installation utilizing a submerged auto-coupling guide rail system for automatic connection and disconnection of the pump from the pipework from outside the sump. Applicable for single and multi pump stations. Advantages: Little space requirement, easy pump service and maintenance.

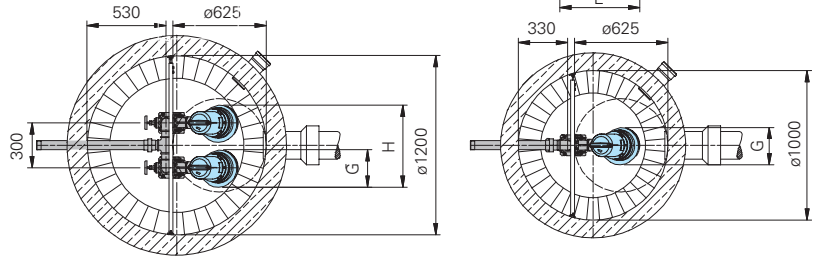

Pump type	A	B	C	D	E	F	G	H	K	L	M	N	P	Q
GRP 16 (B)(Ex)	406	496	212	578	461	364	190	490						
GRP 20 (Ex), 26 (Ex)	468	618	228	651	501	403	223	523	165	191	20	107	277	350
GRP 36 (HD) (Ex)	505	655	228	686	501	403	223	523	165	191	20	107	277	350
GRP 44 (Ex), 50 (Ex)	545	695	238	728	533	436	250	550	180	193	25	119	304	355

Accessories

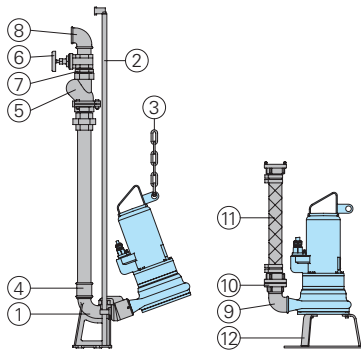

Part Description	Dimension	Part No.
① Auto-coupling system with flanged pump coupling, auto-coupling with flange		
- for Cast iron upper slide rail bracket BSP1/2", GG KKR50S/BSP2"	BSP2"/BSP2"	8604008
- for Cast iron upper slide rail bracket BSP1/2", stainless steel KKR50S/BSP2"	BSP2"/BSP2"	8604009.01
- for Cast iron upper slide rail bracket R1", stainless steel KKR50S-1/BSP2"	BSP2"/BSP2"	8604018
○ Auto-coupling system complete or partial in stainless steel	all types	on request

Part Description	Dimension	Part No.	Part Description	Dimension	Part No.
○ Screw-kits for installation of coupling system		on request	⑧ 90° galvanized elbow	BSP 1/2" F	2113605
○ Inter. upper slide rail bracket	Ø 1/2" for KKR50S and KKR50S Ø 1" für KKR50S-1	7320271 7323714	BSP 2" F		2213606
② Guide rails, pair, per m steel galvanized	Ø 1/2" Ø 1"	2190085 2190135	T-piece for twin pump arrangement	BSP 1/2" F BSP 2" F	2114302 211430
stainless steel	Ø 1/2" Ø 1"	2190250 2190252	⑨ 90° galvanized elbow	BSP 2" F x BSP 1/2" F BSP 2" F/M	2112605 2111506
③ Pump chain sets, tested. With shackle, One- or Two-strand, different lengths and load capacities		on request	⑩ STORZ-fixed coupling	C-BSP1/2" M C-BSP2" F	2010003 201020
④ Galvanized socket	BSP 2" F BSP 2" F x BSP 1/2" F	2109102 2109210	⑪ Reinforced hose, per m (inner dia.)	38 mm dia. 50 mm dia.	2632042 2632050
⑤ Cast iron swing check valve	BSP 1/2" F BSP 2" F	2212902 2212903	STORZ-hose coupling with spigot	C-38 dia. C-52 dia.	2013002 2013003
⑥ Bronze gate valve	BSP 1/2" F BSP 2" F	2216015 2216020	Brass STA-hose coupling	BSP 1 1/2" M	2001513
⑦ Galvanized double nipple	BSP 1/2" M BSP 2" M	2009020 2009018	Hose band	1 1/2" 2"	2304854 2306009
			Synthetic pressure hose with rubber lining and couplings, C-52 mm dia.	length 10 m length 15 m length 20 m length 30 m	2611310 2611315 2611320 2611330
			⑫ Ring base stand for GRP 20, GRP 26 and GRP 36 GRP 44, GRP 50		7321445 7324535
			○ Control panel for single or twin pump stations for automatic operation		On request



HOMA Pumpenfabrik GmbH
 P.O.Box 22 63, D-53814 Neunk.-Seelscheid
 Tel. +49 (0) 22 47/702-0, Fax +49 (0) 22 47/702-44
 e-mail: info@homa-pumpen.de
 www.homapumps.com