



5SV SERIES DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

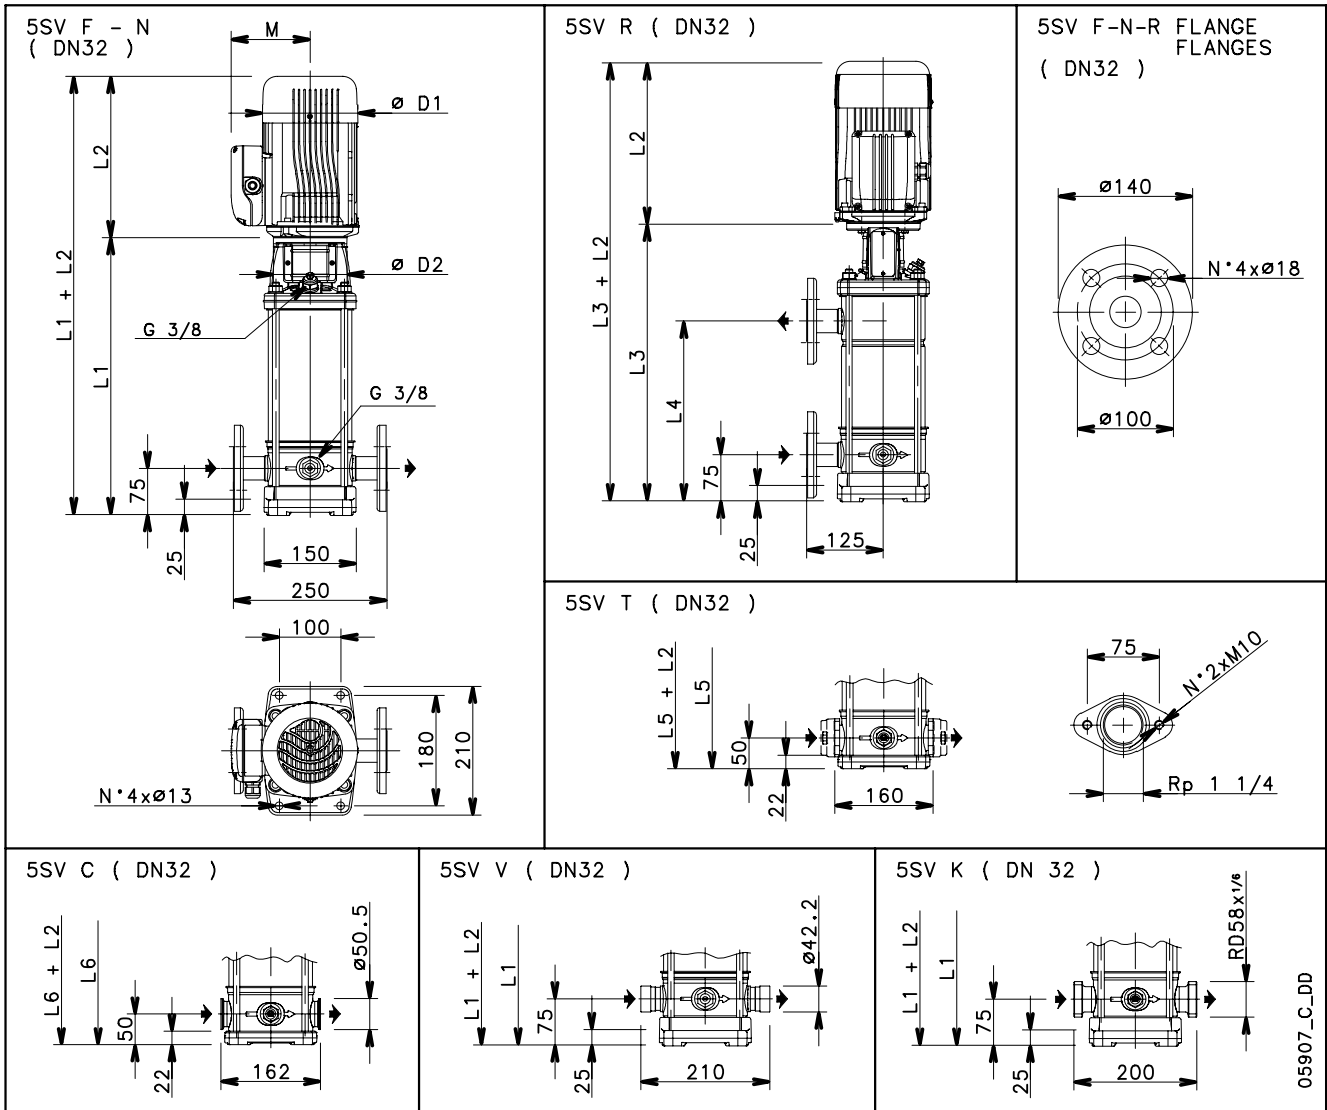

PUMP TYPE	MOTOR		DIMENSIONS (mm)												WEIGHT kg	
	KW	SIZE	L1	L2		L3	L4	L5	L6	M		D1		D2	PUMP	ELECTRIC
5SV02..	0,37	71	268	209	209	-	-	243	243	111	111	120	120	105	8,4	13,2
5SV03..	0,55	71	293	231	231	-	-	268	268	121	121	140	140	105	8,9	15,7
5SV04..	0,55	71	318	231	231	-	-	293	293	121	121	140	140	105	9,4	16,1
5SV05../D	0,75	80	353	226	263	-	-	328	328	121	129	140	155	120	10,5	20,1
5SV06../D	1,1	80	378	263	263	-	-	353	353	137	129	155	155	120	11	22,4
5SV07../D	1,1	80	403	263	263	403	242	378	378	137	129	155	155	120	11,5	22,9
5SV08../D	1,1	80	428	263	263	428	267	403	403	137	129	155	155	120	12,1	23,5
5SV09../D	1,5	90	463	263	263	463	292	438	438	137	129	155	155	140	12,7	26
5SV10../D	1,5	90	488	263	263	488	317	463	463	137	129	155	155	140	13,1	26,5
5SV11../D	1,5	90	513	263	263	513	342	488	488	137	129	155	155	140	13,6	27
5SV12..	2,2	90	538	298	298	538	367	513	513	151	134	174	174	140	14,1	32,3
5SV13..	2,2	90	563	298	298	563	392	538	538	151	134	174	174	140	14,6	32,8
5SV14..	2,2	90	588	298	298	588	417	563	563	151	134	174	174	140	15	33,2
5SV15..	2,2	90	613	298	298	613	442	588	588	151	134	174	174	140	15,5	33,7
5SV16..	2,2	90	638	298	298	638	467	613	613	151	134	174	174	140	16	34,2
5SV18..	3	100	698	-	298	698	517	673	673	-	134	-	174	160	18	39
5SV21..	3	100	773	-	298	773	592	748	748	-	134	-	174	160	19,4	40,4
5SV23..	4	112	823	-	319	823	642	-	798	-	154	-	197	160	20,4	47
5SV25..	4	112	873	-	319	873	692	-	848	-	154	-	197	160	21,3	48
5SV28..	4	112	948	-	319	948	767	-	923	-	154	-	197	160	23	49,4
5SV30..	5,5	132	1018	-	375	1018	817	-	993	-	168	-	214	300	28,1	65,7
5SV33..	5,5	132	1093	-	375	1093	892	-	1068	-	168	-	214	300	29,5	67,1

**5SV SERIES
OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES**

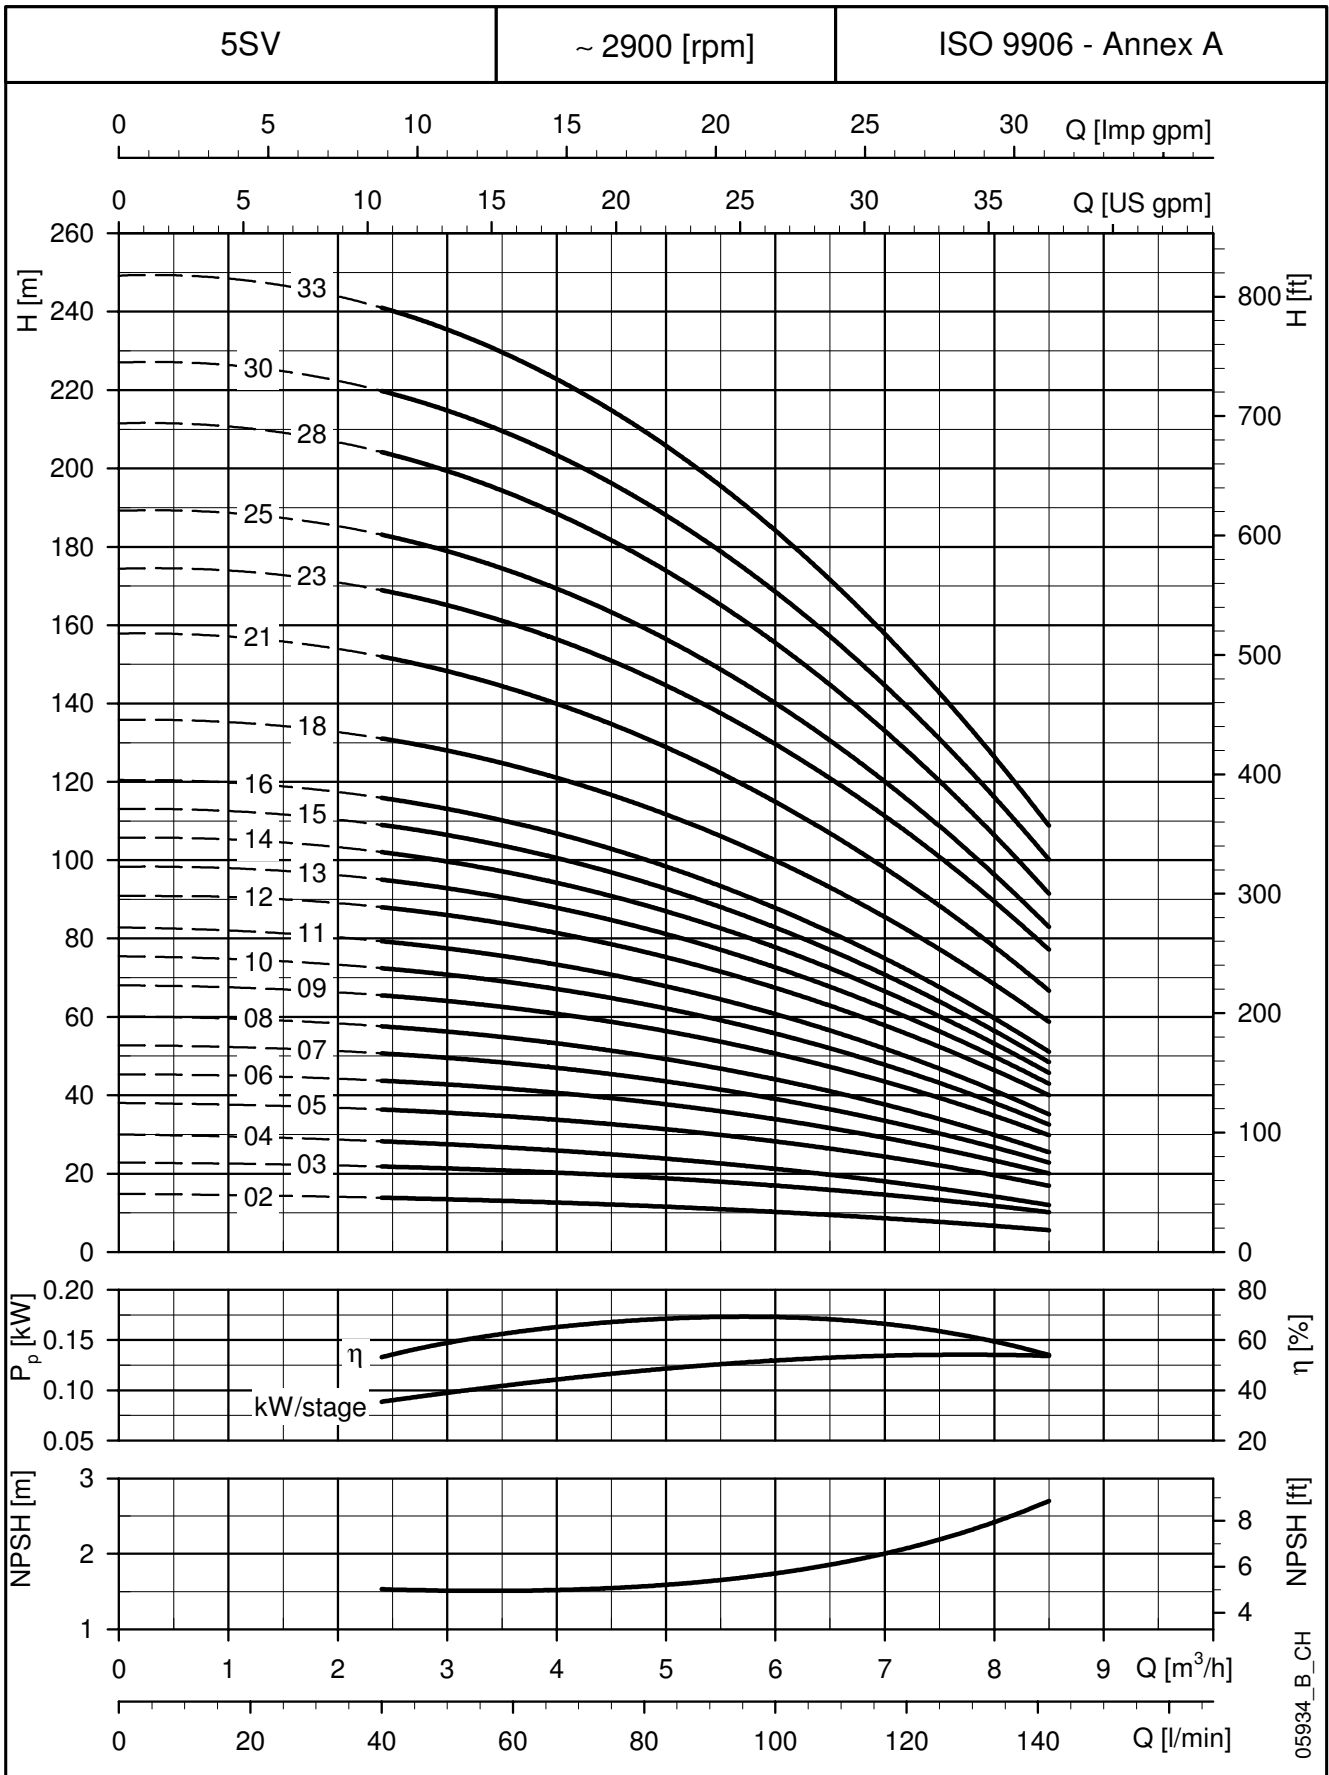

These performances are valid for liquids with density $\rho = 1.0 \text{ Kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.