


<b>PUMP RANGE</b>	CP
<b>MODEL</b>	0025
<b>STATUS</b>	Current



<b>SECTION</b>	2
<b>PAGE</b>	2
<b>DATE</b>	June 2002

### PERFORMANCE DATA

HEAVY		MEDIUM			LIGHT		NIL	
		Abrasion Zone						
500	100	50	20	10	2	1		
Viscosity Limits (Stokes)								

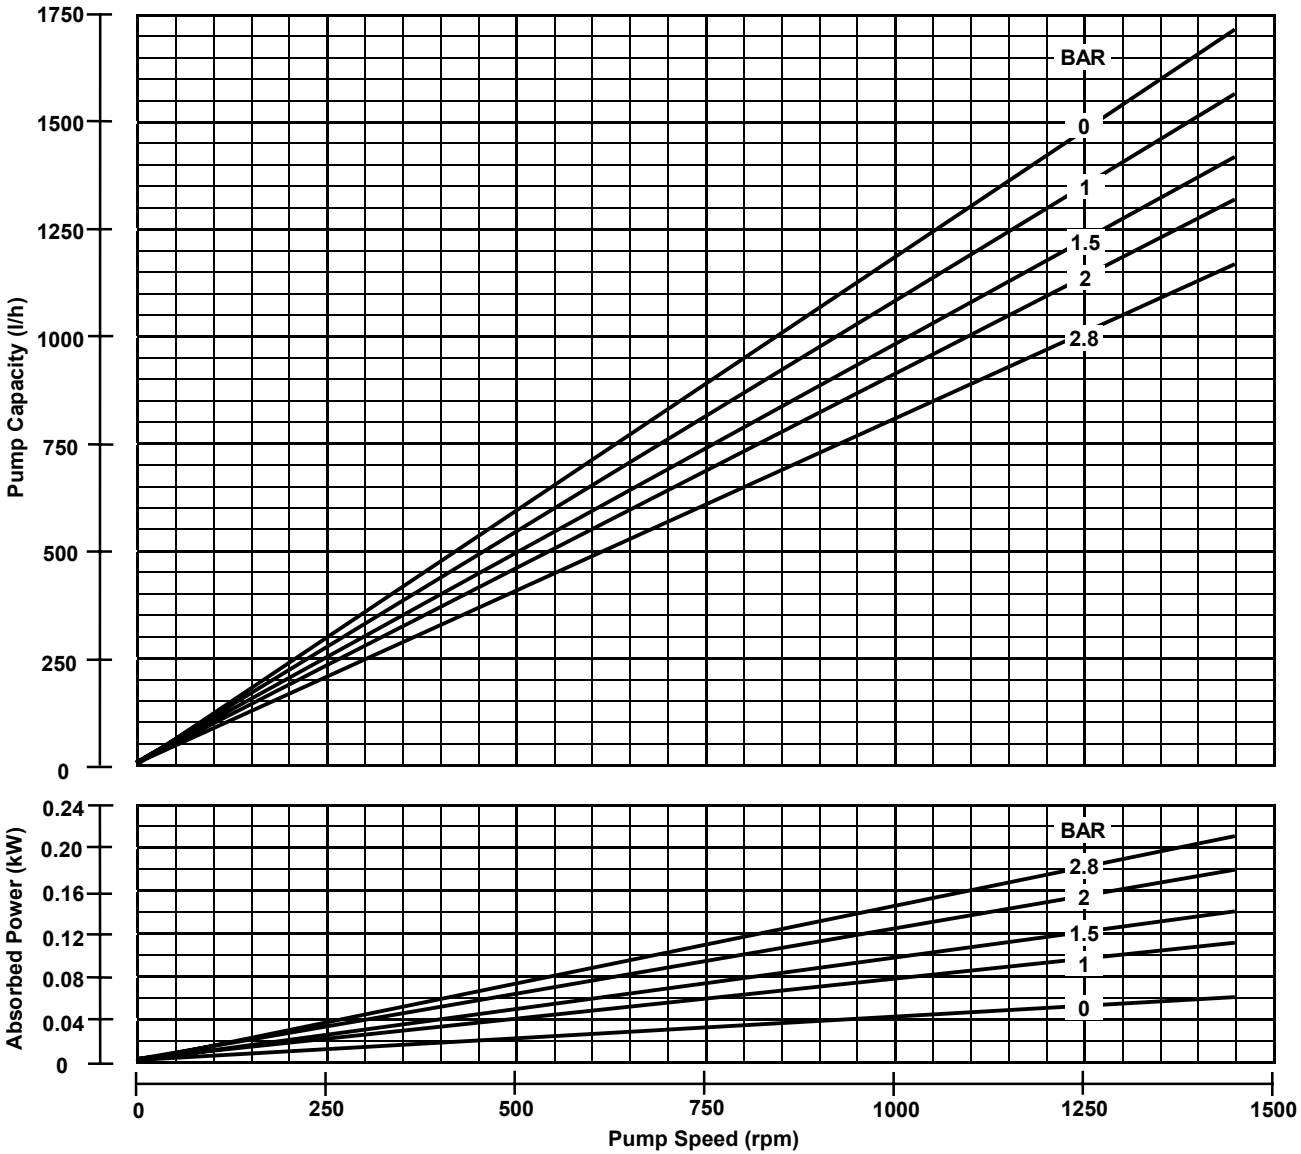

<b>SLIP CORRECTION</b>	$n = \text{corrected duty speed, } n_o = \text{rpm @ 0 bar, } n_p = \text{rpm @ duty press.}$ $n_s = \text{Slip Speed} = n_p - n_o, f \times n_s = \text{Slip Speed Correction} = f.n_s$ <b>Slip Corrected Speed (<math>n = n_p - f.n_s</math>)</b>		
<b>TEST PARAMETERS</b>	Above data represents tests on water @ 20°C using RR stator materials.		
<b>FOOD APPLICATIONS</b>	Check customers CIP process if available. <i>NOTE:</i> The CP Range body parts are not compatible with acids.		
<b>CP</b>	<b>SOLIDS HANDLING (mm)</b>		<b>STARTING TORQUE (Nm)</b>
	Hard Angular	Soft and Compressible	Mark 1
	2.5	10	2

