

ONGA®

14 SERIES

MOULDED WATER TRANSFER PUMP

CENTRIFUGAL PUMPS



142 / 143

12
MONTHS
WARRANTY

FEATURES

High grade corrosion resistant materials.

Award winning high flow impeller.

Strong and durable construction.

Max. head - 41m.

Max. flow - 455lpm.

APPLICATIONS

- Domestic, industrial or rural water transfer pump.
- Typical uses include wash down, tank filling and general water transfer and circulation, irrigation and garden watering.

PUMP INFORMATION

Horizontal, single-stage, surface mounted centrifugal pump with closed impeller for pumping debris free water coupled to a cool running Totally Enclosed Fan Cooled 2 pole motor with external thermal overload (single phase only, three phase units require separate quick trip overload supplied by electrical contactor).

OPERATING CONDITIONS

Suitable for pumping clean non-aggressive liquids without solids or fibres in suspension.

Fluid:	Water.*
Maximum water temperature:	70°C.
Minimum water temperature:	1°C.
Maximum ambient temperature:	55°C.
Maximum working pressure:	630kPa.

*For liquids outside of this range please consult your local Onga office for product suitability.


ELECTRICAL DATA

Type	Type of current	Voltage ± 10%	Frequency Hz	Motor rating kW	Nominal RPM	Current Ampere	Locked rotor current	Motor protection	Insulation class	IP rating
				P2						
142	1-phase	230	50	1.8	2900	10.8 A	38.8 A	External	B	IP44
142	3-phase	400	50	1.8	2900	3.3 A	23.6 A	-	B	IP44
143	1-phase	230 / 460	50	2.4	2900	14 A / 7 A	71 A / 37 A	External	B	IP44
143	3-phase	400	50	2.4	2900	6 A	48 A	-	B	IP44


PERFORMANCE

Type	P/No	Delivery head [m]	5	10	15	20	25	30	35	40
142	314200 / 314230	Capacity [litres per minute]	406	366	316	262	195	102	-	-
143	314300 / 314330		441	403	358	308	252	197	123	22

PERFORMANCE CURVE

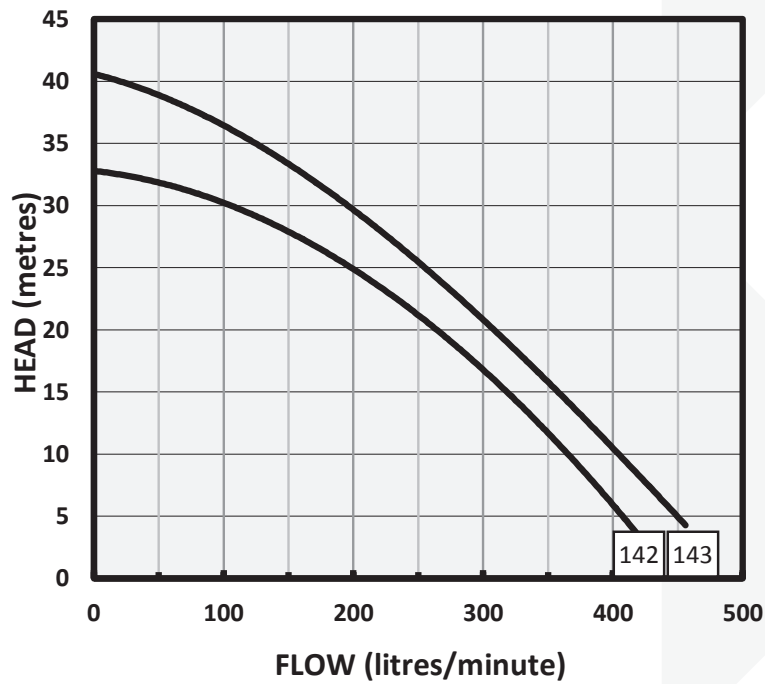

NPSHR

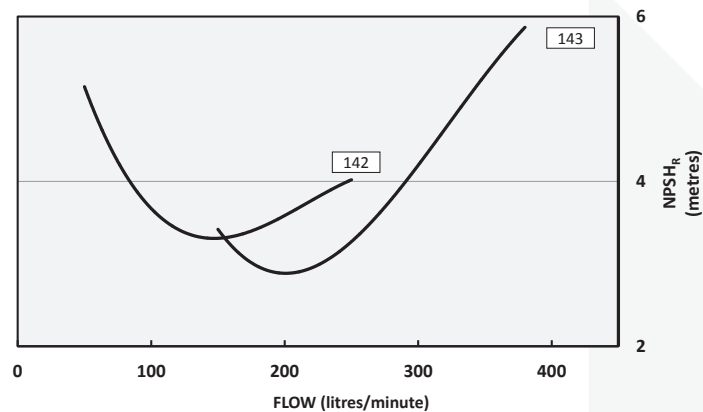


PUMP CONSTRUCTION MATERIALS

Component	Material
Pump casing	20% Glass Filled Noryl
Baffle	20% Glass Filled Noryl
Priming cap	Acetyl
Impeller	20% Glass Filled Polycarbonate
Diffuser	20% Glass Filled Noryl
Shaft sleeve	1-phase = Nylon 3-phase = Stainless Steel
Seal flexible bellows	Nitrile
Seal stationary face	Ceramic
Seal rotating face	Carbon
Seal spring	18-8 Stainless Steel
Motor shaft	Mild Steel
O'Rings	Nitrile

DIMENSIONS

Type	Maximum L x W x H	Weight approx.	Inlet	Pump outlet	Carton L x W x H	Packed weight
142/1	405 x 269 x 298 mm	16.5kg	1½" BSP (male)	1½" BSP (male)	560 x 360 x 460 mm	18kg
142/3	411 x 269 x 305 mm	25.5kg	1½" BSP (male)	1½" BSP (male)	560 x 360 x 460 mm	27kg
143/1	446 x 269 x 303 mm	37.5kg	1½" BSP (male)	1½" BSP (male)	560 x 360 x 460 mm	39kg
143/3	446 x 269 x 303 mm	35.5kg	1½" BSP (male)	1½" BSP (male)	560 x 360 x 460 mm	37kg

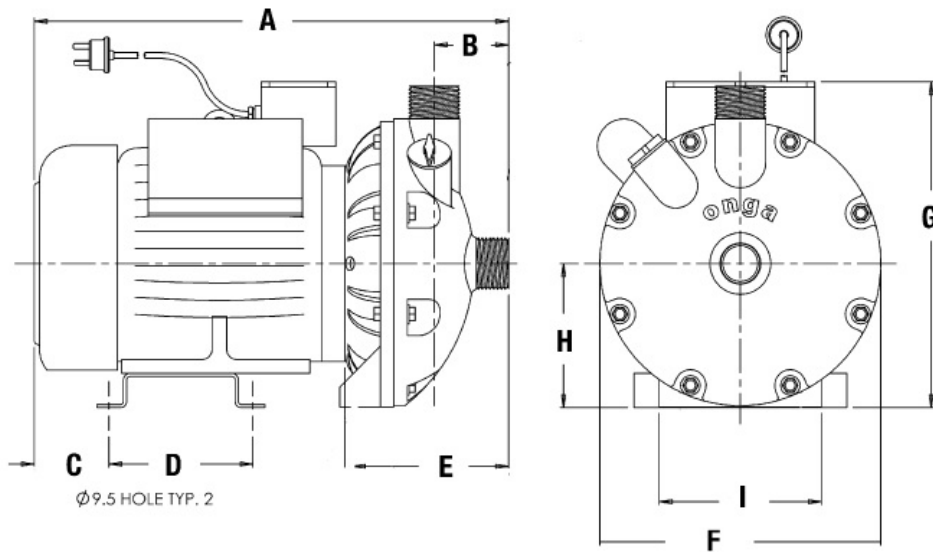

Type	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
142/1	405	70	157	-	154	269	298	134	114
142/3	411	70	145	-	154	269	305	134	114
143/1	446	70	70	135	154	269	303	134	114
143/3	446	70	70	135	154	269	303	134	114



Head Office Pentair AU/NZ: 1-21 Monash Drive, Dandenong South, VIC 3175, Australia. www.pentair.com.au

All Pentair trademarks and logos are owned by Pentair, Ltd. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.

ABN 27 004 856 204 © 2012 Pentair, Ltd. All Rights Reserved.

© 2015 Pentair