

Submersible pressure transmitter for level measurement Model LS-10, standard version

WIKA data sheet PE 81.55



Applications

- Level measurement in rivers and lakes
- Level measurement in vessel and storage systems
- Control of sewage lift and pumping stations
- Monitoring of sewage, settling and stormwater retention basins

Special features

- Robust
- Reliable
- Economical



Submersible pressure transmitter model LS-10

Description

For simple measuring tasks

The model LS-10 submersible pressure transmitter has been optimised for simple measuring requirements in level measurement. It offers excellent quality, is cost-effective and reliable.

It has been designed to the current demands of the industry and has a 4 ... 20 mA output as standard, an accuracy of 0.5% and PUR cable. With IP 68 ingress protection, it is suitable for permanent level measurement up to 100 m water column.

Reliable and long-lasting

The submersible pressure transmitter features a hermetically-sealed and exceptionally robust stainless steel case. The proven, fully-welded construction ensures a long service life and permanent sealing.

Measuring ranges

Relative pressure						
bar	Measuring range	0 ... 0.25	0 ... 0.4	0 ... 0.6	0 ... 1	0 ... 1.6
	Overpressure limit	2	2	3	5	8
	Burst pressure	2.4	2.4	4	6	10
	Measuring range	0 ... 2.5	0 ... 4	0 ... 6	0 ... 10	
	Overpressure limit	8	10	10	10	
	Burst pressure	10	10	10	10	
inWC	Measuring range	0 ... 100	0 ... 150	0 ... 250		
	Overpressure limit	750	750	1,100		
	Burst pressure	950	950	1,600		
psi	Measuring range	0 ... 5	0 ... 10	0 ... 15	0 ... 25	0 ... 50
	Overpressure limit	30	45	70	120	150
	Burst pressure	35	60	90	180	150
	Measuring range	0 ... 100	0 ... 160			
	Overpressure limit	150	160			
	Burst pressure	150	160			
mH₂O	Measuring range	0 ... 2.5	0 ... 4	0 ... 6	0 ... 10	0 ... 16
	Overpressure limit	20	20	30	50	80
	Burst pressure	24	24	40	60	100
	Measuring range	0 ... 25	0 ... 40	0 ... 60	0 ... 100	
	Overpressure limit	80	100	100	100	
	Burst pressure	100	100	100	100	

The given measuring ranges are also available in mbar, kPa and MPa.

Output signal

Analogue signal

4 ... 20 mA

Load in Ω

$\leq (\text{power supply} - 10 \text{ V}) / 0.02 \text{ A} - (\text{cable length in m} \times 0.14 \Omega)$

Voltage supply

Power supply

DC 10 ... 30 V

Reference conditions

Temperature

15 ... 25 °C

Atmospheric pressure

860 ... 1,060 mbar

Humidity

45 ... 75 % relative

Power supply

DC 24 V

Accuracy data

Accuracy at reference conditions

≤ ±0.5 % of span

Including non-linearity, hysteresis, zero offset and end value deviation (corresponds to measured error per IEC 61298-2).

Non-linearity (per IEC 61298-2)

≤ ±0.2 % of span

Non-repeatability

≤ ±0.1 % of span

Temperature error at 0 ... 50 °C

- Mean temperature coefficient of zero point
Measuring ranges ≤ 0.25 bar: ≤ ±0.4 % of span/10 K
Measuring ranges > 0.25 bar: ≤ ±0.2 % of span/10 K
- Mean temperature coefficient of span
≤ ±0.2 % of span/10 K

Long-term stability at reference conditions

≤ ±0.2 % of span/year

Operating conditions

Ingress protection (per IEC 60529)

IP 68

Permissible temperature ranges

- Medium: -10 ... +50 °C
- Ambient: -10 ... +50 °C
- Storage: -30 ... +80 °C

Immersion depth

up to 100 m

Maximum tensile strength of the cable

- without strain relief: up to 350 N
- with strain relief: up to 1,000 N

Weight

- Level probe: approx. 180 g
- Cable: approx. 80 g/m
- Additional weight (accessories): approx. 500 g

Electrical connection

Short-circuit resistance

S₊ vs. U₋

Reverse polarity protection

U₊ vs. U₋

Insulation voltage

DC 500 V

Cable lengths

Available cable lengths					
Meter (m)	1.5	3	5	10	15
	20	25	30	40	50
	60	80	100		
Feet (ft)	5	10	20	30	40
	50				

Other cable lengths on request

Connection diagram

Cable outlet		
	U ₊	brown
	U ₋	green
	Shield	grey

Materials

Wetted parts

- Case from stainless steel
- Sensor out of stainless steel
- Protection cap from PA
- Cable from PUR

Approvals, directives and certificates

Approval


- CSA
- GOST-R

for further approvals, see local website

CE conformity

EMC directive 2004/108/EC, EN 61326 emission (group 1, class B) and immunity (industrial application)

Dimensions in mm

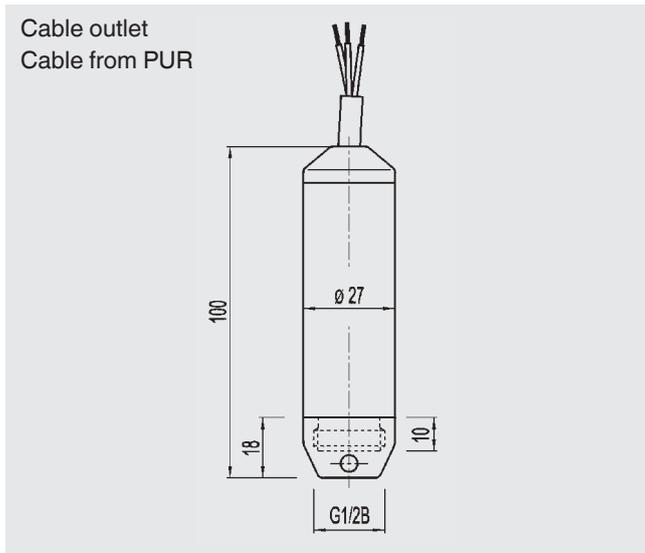

Accessories

	Description	Order number
	<p>Cable strain relief clamp The cable strain relief clamp enables easy and secure mechanical fastening of the submersible pressure transmitter's cable at the measuring point. It acts as a guide for the cable, in order to avoid mechanical damage and to reduce the tensile stress.</p>	14052336
	<p>Additional weight The additional weight increases the dead weight of the submersible pressure transmitter. It simplifies the lowering into monitoring wells, narrow shafts and deep wells. It effectively reduces negative environmental influences on the measuring result from the measured medium (e.g. turbulent flow).</p> <p>CrNi-Stahl 316L, approx. 500 g, length (L) 130 mm</p>	14052341
	<p>Terminal box The terminal box, with IP 67 ingress protection and watertight ventilation element, provides a moisture-free electrical termination for the submersible pressure transmitter. It should be mounted in dry environment or directly in the switch cabinet.</p>	14052339
	<p>Filter element The filter element prevents dirt and moisture from entering the venting tube. The watertight diaphragm also offers a reliable protection for the submersible pressure transmitter.</p>	14052344

Ordering information

Model / Measuring range / Cable length / Accessories

© 2012 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.

