
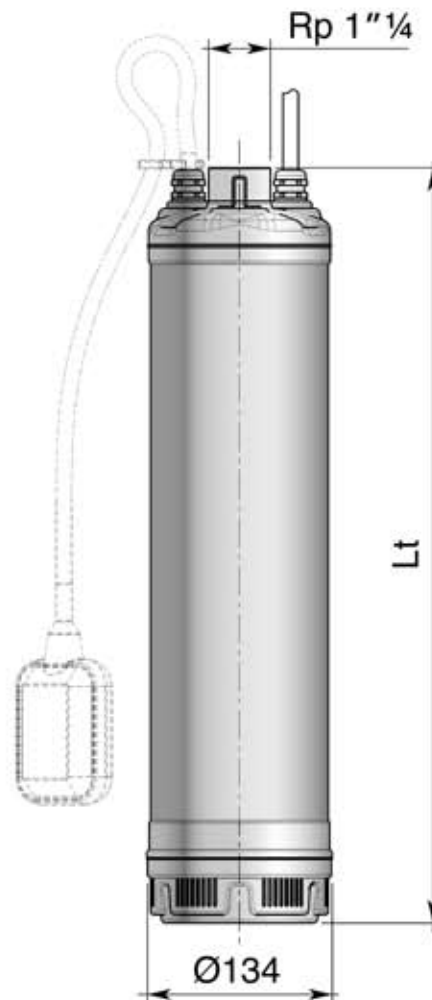


# U5S-3CS SERIES: PERFORMANCE CURVES:

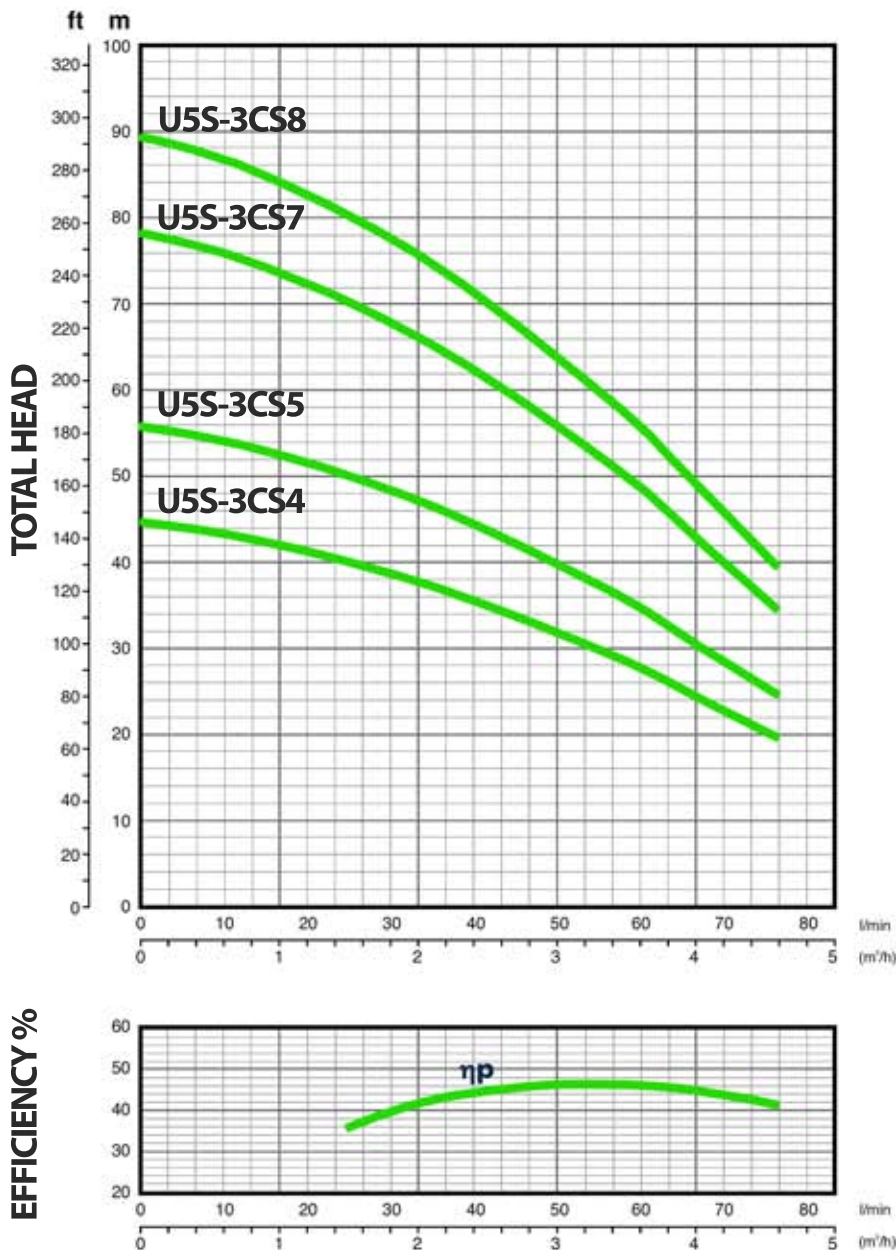

**SPECIFICATIONS:**

MODEL	STAGES	VOLTAGE	START METHOD	MOTOR POWER		INPUT POWER	INTERNAL CAPACITOR		AMPS	LENGTH (Lt)	WEIGHT (Kg)
				KW	HP		KW	UF			
U5S-3CS4-A1	4	240	FLOATSWITCH	0.55	0.75	0.85	16	450	4.5	470	13.8
U5S-3CS4-M1	4	240	MANUAL	0.55	0.75	0.85	16	450	4.5	470	13.5
U5S-3CS4-M3	4	415	MANUAL	0.55	0.75	0.85	-	-	1.9	470	14.8
U5S-3CS5-A1	5	240	FLOATSWITCH	0.75	1	1.0	20	450	4.8	544	15.4
U5S-3CS5-M1	5	240	MANUAL	0.75	1	1.0	20	450	4.8	544	15.3
U5S-3CS5-M3	5	415	MANUAL	0.75	1	1.0	-	-	2.1	544	15.1
U5S-3CS7-A1	7	240	FLOATSWITCH	0.9	1.2	1.35	30	450	6.6	592	17.5
U5S-3CS7-M1	7	240	MANUAL	0.9	1.2	1.35	30	450	6.6	592	17.5
U5S-3CS7-M3	7	415	MANUAL	0.9	1.2	1.35	-	-	2.5	592	16.3
U5S-3CS8-A1	8	240	FLOATSWITCH	1.1	1.5	1.55	30	450	7.2	616	18.2
U5S-3CS8-M1	8	240	MANUAL	1.1	1.5	1.55	30	450	7.2	616	18.2
U5S-3CS8-M3	8	415	MANUAL	1.1	1.5	1.55	-	-	2.7	616	17.2

ALL INFORMATION WITHIN THIS BROCHURE IS BELIEVED TO BE CORRECT AT THE TIME OF PRINTING, AND MAY BE SUBJECT TO CHANGE WITHOUT NOTICE.

