


Description	Value
<b>General information:</b>	
Product name:	UPS 25-80 N 180
Product No:	<a href="#">95906439</a>
EAN number:	5700310346588
Price:	AUD 1323
<b>Technical:</b>	
Speed no:	3
Rated flow:	4.95 m <sup>3</sup> /h
Rated head:	4.56 m
Maximum head:	80 dm
TF class:	110
Approvals:	CE,EAC,WEEE,RCM
<b>Materials:</b>	
Pump housing:	Stainless steel
Pump housing:	EN 1.4308
Pump housing:	AISI 304
Impeller:	Composite
Impeller:	PES+30% GF
<b>Installation:</b>	
Range of ambient temperature:	0 .. 40 °C
Amb. max at 80 dgr C liquid:	40 °C
Maximum operating pressure:	10 bar
Type of connection:	G
Size of connection:	1 1/2 inch
Pressure rating for connection:	PN 10
Port-to-port length:	180 mm
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-25 .. 110 °C
Selected liquid temperature:	60 °C
Density:	983.2 kg/m <sup>3</sup>
<b>Electrical data:</b>	
Power input in speed 1:	110 W
Power input in speed 2:	155 W
Max. power input:	165 W
Mains frequency:	50 Hz
Rated voltage:	1 x 230 V
Current in speed 1:	0.5 A
Current in speed 2:	0.7 A
Current in speed 3:	0.7 A
Capacitor size - run:	4 µF
Enclosure class (IEC 34-5):	X2D
Insulation class (IEC 85):	F
Built-in motor protection:	CONTACT
Thermal protec:	internal
<b>Others:</b>	
Terminal box position:	9H
Net weight:	4.65 kg
Gross weight:	4.93 kg
Shipping volume:	0.008 m <sup>3</sup>
Danish VVS No.:	380633100
Swedish RSK No.:	5803099
Finnish LVI No.:	4615614
Norwegian NRF no.:	9042217
Country of origin:	RS
Custom tariff no.:	84137090622081967



Pumped liquid = Water  
 Liquid temperature during operation = 60 °C  
 Density = 983.2 kg/m<sup>3</sup>

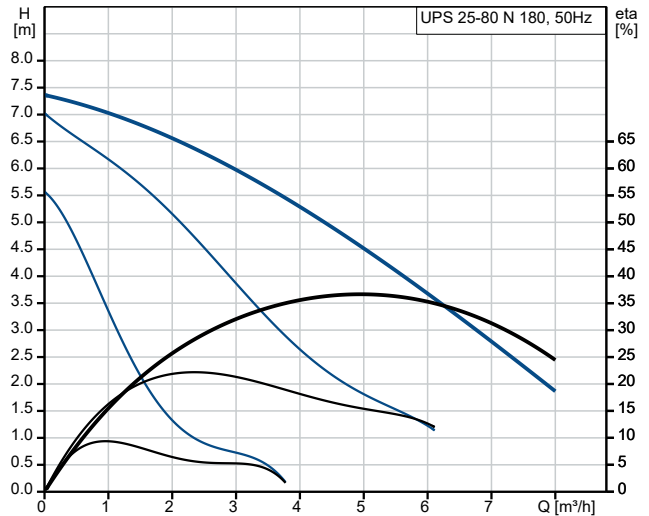