
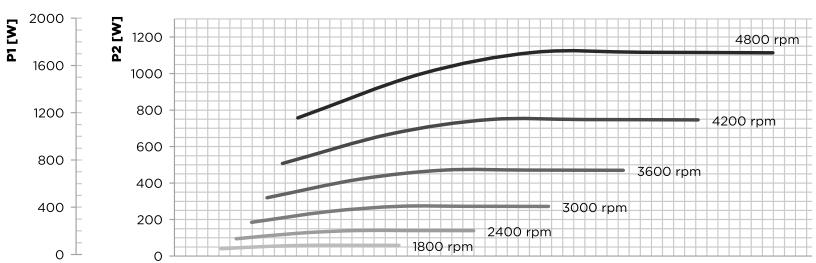


# Performance

## 4HS 08/03

Technical specifications	
<b>Rated input voltage</b>	1 x 190 - 265 VAC
<b>Max input current</b>	9.5 A
<b>Power factor</b>	1
<b>Max input power</b>	1800 W
<b>Length</b>	858 mm
<b>Discharge</b>	1 1/2" or 2"
<b>Pump weight</b>	19.4 Kg
<b>Max diameter</b>	99 mm*
<b>Packing size</b>	120x20x29 cm
<b>Packing weight</b>	21 Kg

\* Max external diameter including cable and cable cover

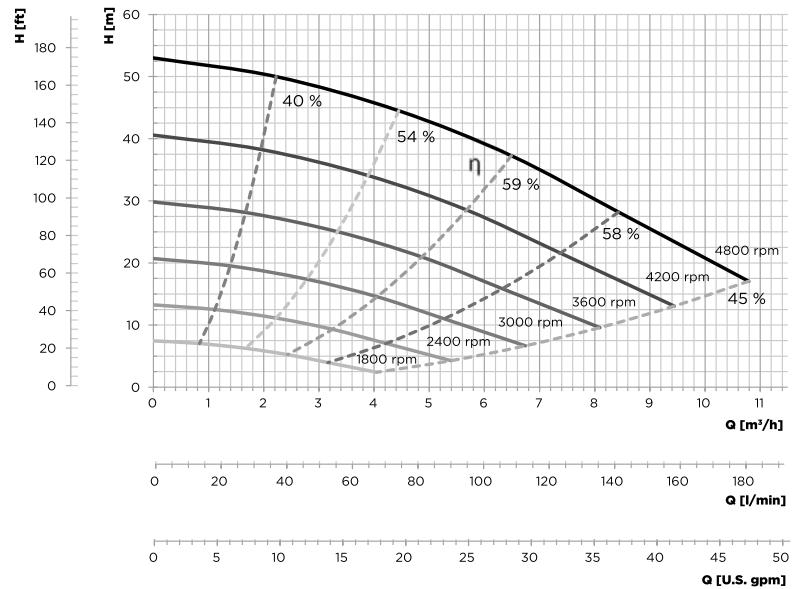

## 4HS 08/05

Technical specifications	
<b>Rated input voltage</b>	1 x 190 - 265 VAC
<b>Max input current</b>	9.5 A
<b>Power factor</b>	1
<b>Max input power</b>	3200 W
<b>Length</b>	950 mm
<b>Discharge</b>	1 1/2" or 2"
<b>Pump weight</b>	21 Kg
<b>Max diameter</b>	99 mm*
<b>Packing size</b>	120x20x29 cm
<b>Packing weight</b>	22 Kg

\* Max external diameter including cable and cable cover

